

# **Technical Information Manual**

Revision n. 7

6 November 2007

**MOD. V1724**

*8 CHANNEL 14 BIT  
100 MS/S DIGITIZER*  
**MANUAL REV.7**

**NPO:**

**00103/05:V1724x.MUTx/07**

CAEN will repair or replace any product within the guarantee period if the Guarantor declares that the product is defective due to workmanship or materials and has not been caused by mishandling, negligence on behalf of the User, accident or any abnormal conditions or operations.

**CAEN declines all responsibility for damages or injuries caused by an improper use of the Modules due to negligence on behalf of the User. It is strongly recommended to read thoroughly the CAEN User's Manual before any kind of operation.**



*CAEN reserves the right to change partially or entirely the contents of this Manual at any time and without giving any notice.*

### **Disposal of the Product**

*The product must never be dumped in the Municipal Waste. Please check your local regulations for disposal of electronics products.*



---

## TABLE OF CONTENTS

<b>1. GENERAL DESCRIPTION.....</b>	<b>8</b>
1.1. OVERVIEW .....	8
1.2. BLOCK DIAGRAM.....	9
<b>2. TECHNICAL SPECIFICATIONS.....</b>	<b>10</b>
2.1. PACKAGING.....	10
2.2. POWER REQUIREMENTS .....	10
2.3. FRONT PANEL.....	11
2.4. EXTERNAL CONNECTORS.....	12
2.4.1. ANALOG INPUT connectors.....	12
2.4.2. CONTROL connectors.....	12
2.4.3. ADC REFERENCE CLOCK connectors .....	12
2.4.4. Digital I/O connectors.....	13
2.4.5. Optical LINK connector .....	13
2.5. OTHER FRONT PANEL COMPONENTS .....	13
2.5.1. Displays.....	13
2.6. INTERNAL COMPONENTS .....	13
2.7. TECHNICAL SPECIFICATIONS TABLE .....	15
<b>3. FUNCTIONAL DESCRIPTION.....</b>	<b>16</b>
3.1. ANALOG INPUT.....	16
3.1.1. Single ended input .....	16
3.1.2. Differential input .....	16
3.2. CLOCK DISTRIBUTION .....	17
3.2.1. Direct Drive Mode.....	17
3.2.2. PLL Mode .....	18
3.2.3. Trigger Clock.....	18
3.2.4. Output Clock.....	18
3.2.5. AD9510 programming .....	18
3.2.6. PLL programming .....	19
3.2.7. Direct Drive programming .....	19
3.2.8. Configuration file .....	19
3.2.9. Multiboard synchronisation.....	20
3.2.10. Internal clock.....	20
3.2.11. External clock and multiboard synchronisation.....	20
3.3. ACQUISITION MODES .....	20
3.3.1. Acquisition run/stop.....	20
3.3.2. Gate and Sample mode acquisition .....	21
3.3.2.1. Gate mode .....	21
3.3.3. Sample mode.....	22
3.3.4. Acquisition Triggering: Samples and Events.....	22
3.3.4.1. Custom size events .....	23
3.3.5. Event structure.....	24
3.3.6. Memory FULL management.....	25

3.4.	ZERO SUPPRESSION .....	25
3.4.1.	Zero Suppression Algorithm.....	25
3.4.1.1.	Full Suppression based on the integral of the signal.....	25
3.4.1.2.	Full Suppression based on the amplitude of the signal.....	25
3.4.1.3.	Zero Length Encoding ZLE.....	25
3.5.	TRIGGER MANAGEMENT .....	30
3.5.1.	External trigger.....	30
3.5.2.	Software trigger.....	30
3.5.3.	Local channel auto-trigger.....	31
3.5.4.	Trigger distribution.....	31
3.6.	FRONT PANEL I/OS.....	31
3.7.	ANALOG MONITOR.....	32
3.7.1.	Trigger Majority Mode (Monitor Mode = 0).....	32
3.7.2.	Test Mode (Monitor Mode = 1).....	33
3.7.3.	Analog Monitor/Inspection Mode (Monitor Mode = 2) .....	33
3.7.3.1.	Procedure to enable "Analog Monitor" mode .....	34
3.7.3.2.	Applications examples .....	34
3.7.4.	Buffer Occupancy Mode (Monitor Mode = 3).....	35
3.7.5.	Voltage Level Mode (Monitor Mode = 4).....	35
3.8.	TEST PATTERN GENERATOR.....	36
3.9.	RESET, CLEAR AND DEFAULT CONFIGURATION .....	36
3.9.1.	Global Reset .....	36
3.9.2.	Memory Reset .....	36
3.9.3.	Timer Reset.....	36
3.10.	VMEBUS INTERFACE .....	36
3.10.1.	Addressing capabilities.....	36
3.10.1.1.	Base address.....	36
3.10.1.2.	CR/CSR address .....	37
3.10.1.3.	Address relocation .....	37
3.11.	DATA TRANSFER CAPABILITIES .....	38
3.12.	EVENTS READOUT .....	38
3.12.1.	Sequential readout.....	38
3.12.1.1.	SINGLE D32 .....	38
3.12.1.2.	BLOCK TRANSFER D32/D64, 2eVME .....	38
3.12.1.3.	CHAINED BLOCK TRANSFER D32/D64 .....	39
3.12.2.	Random readout (to be implemented).....	39
3.12.3.	Event Polling .....	40
3.13.	OPTICAL LINK.....	40
3.13.1.	CAENVME_Init.....	41
3.13.2.	CAENVME_End.....	41
3.13.3.	CAENVME_ReadCycle .....	42
3.13.4.	CAENVME_WriteCycle.....	42
3.13.5.	CAENVME_MultiRead.....	42
3.13.6.	CAENVME_MultiWrite .....	43
3.13.7.	CAENVME_BLTReadCycle.....	43

3.13.8.	CAENVME_FIFOBLTReadCycle.....	44
3.13.9.	CAENVME_MBLTReadCycle .....	44
3.13.10.	CAENVME_FIFOMBLTReadCycle .....	44
3.13.11.	CAENVME_IRQCheck .....	45
3.13.12.	CAENVME_IRQEnable.....	45
3.13.13.	CAENVME_IRQDisable.....	45
3.13.14.	CAENVME_IRQWait.....	46
<b>4.</b>	<b>VME INTERFACE .....</b>	<b>47</b>
4.1.	REGISTERS ADDRESS MAP .....	47
4.2.	CONFIGURATION ROM (0xF000-0xF084; R).....	48
4.3.	CHANNEL N ZS_THRES (0x1N24; R/W).....	49
4.4.	CHANNEL N ZS_NSAMP (0x1N28; R/W).....	50
4.5.	CHANNEL N THRESHOLD (0x1N80; R/W).....	50
4.6.	CHANNEL N OVER/UNDER THRESHOLD (0x1N84; R/W) .....	50
4.7.	CHANNEL N STATUS (0x1N88; R).....	50
4.8.	CHANNEL N AMC FPGA FIRMWARE (0x1N8C; R) .....	50
4.9.	CHANNEL N BUFFER OCCUPANCY (0x1N94; R).....	51
4.10.	CHANNEL N DAC REGISTER (0x1N98; R/W) .....	51
4.11.	CHANNEL N ADC CONFIGURATION (0x1N9C; R/W).....	51
4.12.	CHANNEL CONFIGURATION (0x8000; R/W).....	51
4.13.	CHANNEL CONFIGURATION BIT SET (0x8004; W).....	52
4.14.	CHANNEL CONFIGURATION BIT CLEAR (0x8008; W).....	52
4.15.	BUFFER ORGANIZATION (0x800C; R/W) .....	52
4.16.	BUFFER FREE (0x8010; R/W).....	52
4.17.	CUSTOM SIZE (0x8020; R/W) .....	52
4.18.	ACQUISITION CONTROL (0x8100; R/W).....	53
4.19.	ACQUISITION STATUS (0x8104; R).....	53
4.20.	SOFTWARE TRIGGER (0x8108; W).....	54
4.21.	TRIGGER SOURCE ENABLE MASK (0x810C; R/W).....	54
4.22.	FRONT PANEL TRIGGER OUT ENABLE MASK (0x8110; R/W) .....	54
4.23.	POST TRIGGER SETTING (0x8114; R/W) .....	55
4.24.	FRONT PANEL I/O DATA (0x8118; R/W).....	55
4.25.	FRONT PANEL I/O CONTROL (0x811C; R/W).....	55
4.26.	CHANNEL ENABLE MASK (0x8120; R/W).....	56
4.27.	ROC FPGA FIRMWARE REVISION (0x8124; R).....	56
4.28.	DOWNSAMPLE FACTOR (0x8128; R/W) .....	56
4.29.	EVENT STORED (0x812C; R).....	56
4.30.	SET MONITOR DAC (0x8138; R/W).....	57

4.31.	BOARD INFO (0x8140; R) .....	57
4.32.	MONITOR MODE (0x8144; R/W) .....	57
4.33.	EVENT SIZE (0x814C; R) .....	57
4.34.	ANALOG MONITOR (0x8150; R/W) .....	57
4.35.	VME CONTROL (0xEF00; R/W) .....	58
4.36.	VME STATUS (0xEF04; R) .....	58
4.37.	BOARD ID (0xEF08; R/W) .....	58
4.38.	MCST BASE ADDRESS AND CONTROL (0xEF0C; R/W) .....	58
4.39.	RELOCATION ADDRESS (0xEF10; R/W) .....	59
4.40.	INTERRUPT STATUS ID (0xEF14; R/W) .....	59
4.41.	INTERRUPT EVENT NUMBER (0xEF18; R/W) .....	59
4.42.	BLT EVENT NUMBER (0xEF1C; R/W) .....	59
4.43.	SCRATCH (0xEF20; R/W) .....	59
4.44.	SOFTWARE RESET (0xEF24; W) .....	59
4.45.	SOFTWARE CLEAR (0xEF28; W) .....	59
4.46.	FLASH ENABLE (0xEF2C; R/W) .....	59
4.47.	FLASH DATA (0xEF30; R/W) .....	60
<b>5.</b>	<b>INSTALLATION .....</b>	<b>61</b>
5.1.	POWER ON SEQUENCE .....	61
5.2.	POWER ON STATUS .....	61
5.3.	FIRMWARE UPGRADE .....	61
5.3.1.	V1724 Upgrade files description .....	62

---

## ***LIST OF FIGURES***

FIG. 1.1:	MOD. V1724 BLOCK DIAGRAM .....	9
FIG. 2.1:	MOD. V1724 FRONT PANEL .....	11
FIG. 2.2:	AMP CLK IN/OUT CONNECTOR .....	12
FIG. 2.3:	ROTARY AND DIP SWITCHES LOCATION .....	14
FIG. 3.1:	SINGLE ENDED INPUT DIAGRAM .....	16
FIG. 3.2:	DIFFERENTIAL INPUT DIAGRAM .....	16
FIG. 3.3:	CLOCK DISTRIBUTION DIAGRAM .....	17
FIG. 3.4:	CAENPLLCONFIG MAIN MENU .....	19
FIG. 3.5:	DATA STORAGE IN GATE MODE .....	21
FIG. 3.6:	DATA STORAGE IN SAMPLE MODE .....	22
FIG. 3.7:	TRIGGER OVERLAP .....	23
FIG. 3.8:	ZERO SUPPRESSION EXAMPLE .....	26

FIG. 3.9: EXAMPLE WITH POSITIVE LOGIC AND NON-OVERLAPPING $N_{LBK} / N_{LFW}$ .....	27
FIG. 3.10: EXAMPLE WITH NEGATIVE LOGIC AND NON-OVERLAPPING $N_{LBK} / N_{LFW}$ .....	27
FIG. 3.11: EXAMPLE WITH POSITIVE LOGIC AND NON OVERLAPPING $N_{LBK}$ .....	28
FIG. 3.12: EXAMPLE WITH POSITIVE LOGIC AND OVERLAPPING $N_{LBK}$ .....	29
FIG. 3.13: BLOCK DIAGRAM OF TRIGGER MANAGEMENT .....	30
FIG. 3.14: LOCAL TRIGGER GENERATION .....	31
FIG. 3.15: MAJORITY LOGIC (2 CHANNELS OVER THRESHOLD; BIT[6] OF CH. CONFIG. REGISTER =0) .....	33
FIG. 3.16: INSPECTION MODE DIAGRAM .....	33
FIG. 3.17: EXAMPLE OF MAGNIFY PARAMETER USE ON SINGLE CHANNEL .....	34
FIG. 3.18: EXAMPLE OF MAGNIFY AND OFFSET PARAMETERS USE ON SINGLE CHANNEL .....	35
FIG. 3.19: A24 ADDRESSING .....	37
FIG. 3.20: A32 ADDRESSING .....	37
FIG. 3.21: CR/CSR ADDRESSING .....	37
FIG. 3.22: SOFTWARE RELOCATION OF BASE ADDRESS .....	37
FIG. 3.23: EXAMPLE OF BLT READOUT .....	39
FIG. 3.24: EXAMPLE OF RANDOM READOUT .....	40
FIG. 3.25: OPTICAL LINK DAISY CHAIN .....	41

---

## ***LIST OF TABLES***

TABLE 1.1: MOD. V1724 VERSIONS .....	8
TABLE 2.1: MODEL V1724 POWER REQUIREMENTS .....	10
TABLE 2.2 : FRONT PANEL LEDES .....	13
TABLE 2.3 : MOD. V1724 TECHNICAL SPECIFICATIONS .....	15
TABLE 3.1: BUFFER ORGANIZATION .....	22
TABLE 3.2 : EVENT ORGANIZATION .....	24
TABLE 3.3 : FRONT PANEL I/Os DEFAULT SETTING .....	32
TABLE 4.1: ADDRESS MAP FOR THE MODEL V1724 .....	47
TABLE 4.2: ROM ADDRESS MAP FOR THE MODEL V1724 .....	49
TABLE 4.3: OUTPUT BUFFER MEMORY BLOCK DIVISION .....	52

---

# 1. General description

---

## 1.1. Overview

The Mod. V1724 is a 1-unit wide VME 6U module housing a 8 Channel 14 bit 100 MS/s Flash ADC Waveform Digitizer with threshold Auto-Trigger capabilities.

The board is available with different input range, memory and connector configuration, as summarised by the following table:

**Table 1.1: Mod. V1724 versions**

Model	Input type	SRAM Memory	Optical link	AMC FPGA(*)	Form factor
V1724LC	Single ended	512 Ksamples / ch	No	EP1C4	6U-VME64
V1724	Single ended	512 Ksamples / ch	Yes	EP1C4	6U-VME64
V1724B	Single ended	4 Msamples / ch	Yes	EP1C4	6U-VME64
V1724C	Differential	512 Ksamples / ch	Yes	EP1C4	6U-VME64
V1724D	Differential	4 Msamples / ch	Yes	EP1C4	6U-VME64
V1724E	Single ended	4 Msamples / ch	Yes	EP1C20	6U-VME64
V1724F	Differential	4 Msamples / ch	Yes	EP1C20	6U-VME64
VX1724	Single ended	512 Ksamples / ch	Yes	EP1C4	6U-VME64X
VX1724B	Single ended	4 Msamples / ch	Yes	EP1C4	6U-VME64X
VX1724C	Differential	512 Ksamples / ch	Yes	EP1C4	6U-VME64X
VX1724D	Differential	4 Msamples / ch	Yes	EP1C4	6U-VME64X
VX1724E	Single ended	4 Msamples / ch	Yes	EP1C20	6U-VME64X
VX1724F	Differential	4 Msamples / ch	Yes	EP1C20	6U-VME64X

(\*) AMC: ADC e Memory controller FPGA. Models available: ALTERA Cyclone EP1C4 (4000 Logic elements) or ALTERA Cyclone EP1C20 (20000 Logic elements).

Single ended input versions, optionally, are available with 10 Vpp dynamic range (default range: 2.25 Vpp).

The DC offset of the signal can be adjusted channel per channel by means of a programmable 16bit DAC.

The board features a front panel clock/reference In/Out and a PLL for clock synthesis from internal/external references. This allows multi board phase synchronisations to an external clock source or to a V1724 clock master board.

The data stream is continuously written in a circular memory buffer; when the trigger occurs the FPGA writes further N samples for the post trigger and freezes the buffer that then can be read either via VME or via Optical Link; the acquisition can continue without dead-time in a new buffer. Each channel has a SRAM memory, divided in buffers of programmable size.

The trigger signal can be provided via the front panel input as well as via the VMEbus, but it can also be generated internally, as soon as a programmable voltage threshold is reached. The individual Auto-Trigger of one channel can be propagated to the other channels and onto the front panel Trigger Output.

The VME interface is VME64X compliant and the data readout can be performed in




Single Data Transfer (D32), 32/64 bit Block Transfer (BLT/MBLT), 2eVME, 2eSST and 32/64 bit Chained Block Transfer (CBLT).

The board houses a daisy chainable Optical Link able to transfer data at 80 MB/s, thus it is possible to connect up to eight V1724 (64 ADC channels) to a single Optical Link Controller (Mod. A2818, see Accessories/Controller).

The V1724 can be controlled and readout through the Optical Link in parallel to the VME interface.

The Mod. V1724LC is also available, a simplified version of the Mod. V1724, without Optical Link and Analog Monitor features.

## 1.2. Block Diagram

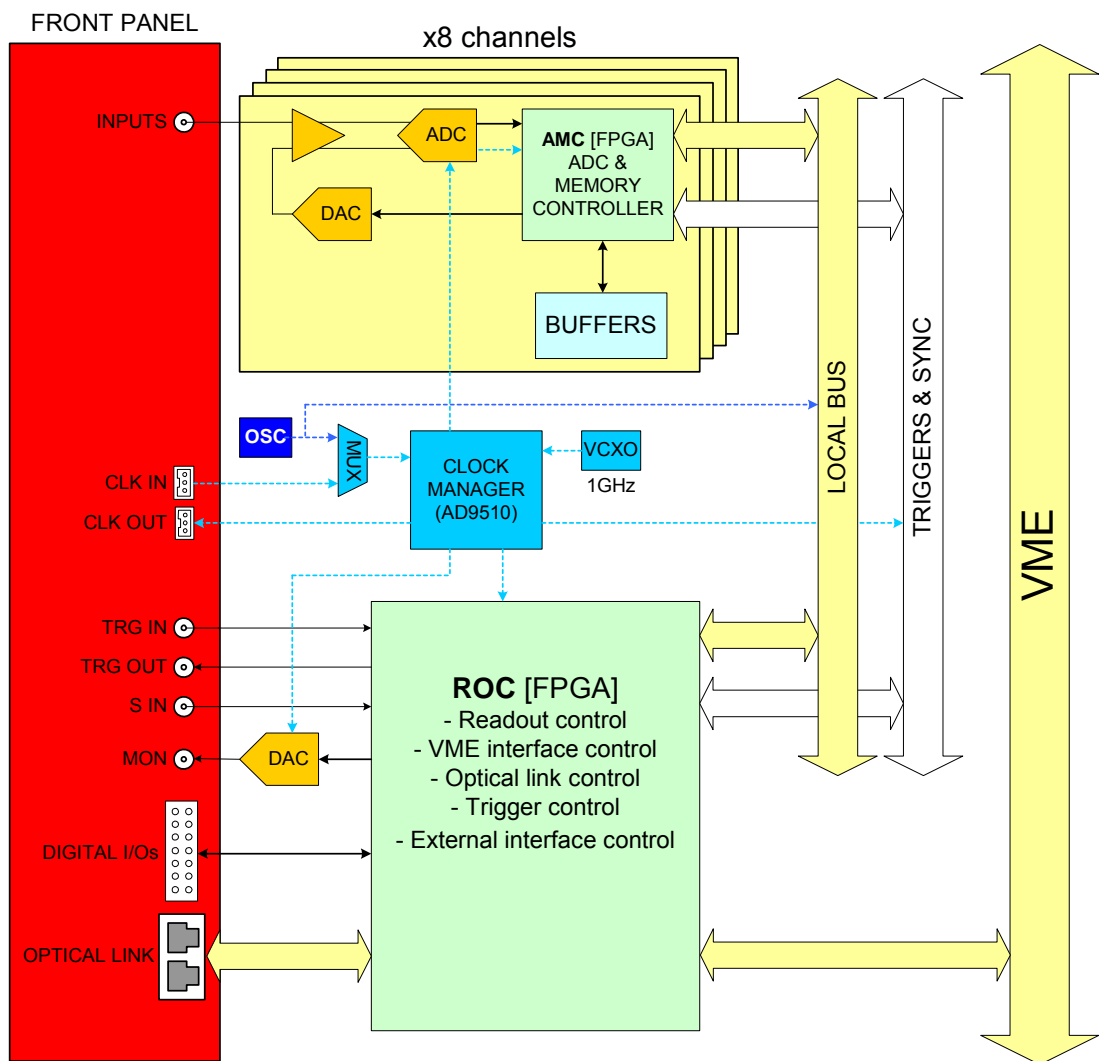

**Fig. 1.1: Mod. V1724 Block Diagram**

The function of each block will be explained in detail in the subsequent sections.

---

## 2. Technical specifications

---

### 2.1. Packaging

The module is housed in a 6U-high, 1U-wide VME unit. The board hosts the VME P1, and P2 connectors and fits into both VME/VME64 standard and V430 backplanes. VX1724 versions require VME64X compliant crates.

---

### 2.2. Power requirements

The power requirements of the module are as follows:

Table 2.1: Model V1724 power requirements

<b>+5 V</b>	<b>4.50 A</b>
<b>+12 V</b>	<b>0.2 A</b>
<b>-12 V</b>	<b>0.2 A</b>

## 2.3. Front Panel

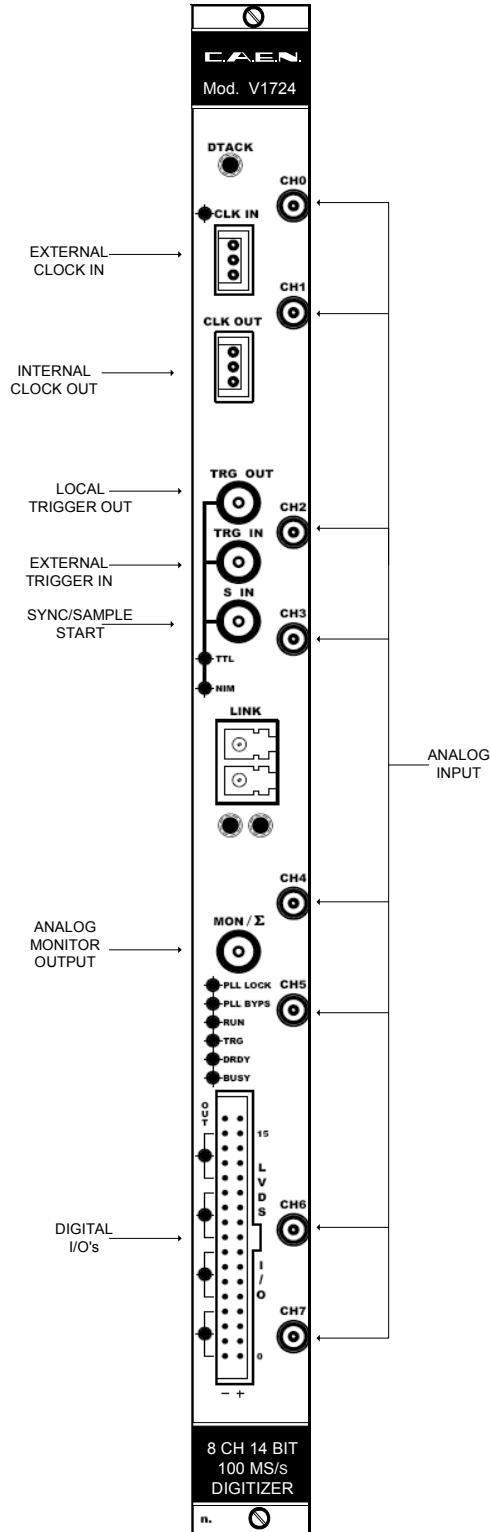


Fig. 2.1: Mod. V1724 front panel

---

## 2.4. External connectors

---

### 2.4.1. ANALOG INPUT connectors

**Single ended version** (see options in § 1.1):

*Function:*

Analog input, single ended, input dynamics: 2.25Vpp Zin=50Ω (on request: 10Vpp Zin=1KΩ)

*Mechanical specifications:*

MCX connector (CS 85MCX-50-0-16 SUHNER)

**Differential version** (see options in § 1.1):

*Function:*

Analog input, differential, input dynamics: 2.25Vpp Zin=100Ω or 10Vpp Zin=1KΩ

*Mechanical specifications:*

Tyco MODU II

**N.B.: absolute max analog input voltage = 6Vpp (with Vrail max to +6V or -6V) for any DAC offset value**

---

### 2.4.2. CONTROL connectors

*Function:*


- TRG OUT: Local trigger output (NIM/TTL, on Rt = 50Ω)
- TRG IN: External trigger input (NIM/TTL, Zin= 50Ω)
- SYNC/SAMPLE/START: Sample front panel input (NIM/TTL, Zin=50Ω)
- MON/Σ: DAC output 1Vpp on Rt=50Ω (not available on Mod. V1724LC)

*Mechanical specifications:*

00-type LEMO connectors

---

### 2.4.3. ADC REFERENCE CLOCK connectors

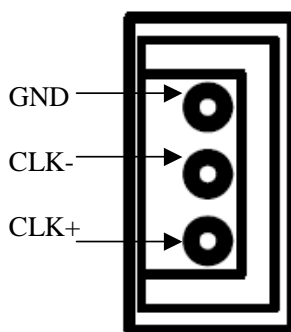

**Fig. 2.2: AMP CLK IN/OUT Connector**

*Function:*

CLK IN: External clock/Reference input, AC coupled (diff. LVDS, ECL, PECL, LVPECL, CML), Zdiff= 110Ω.

*Mechanical specifications:*

AMP 3-102203-4 connector

*Function:*

CLOCK OUT: Clock output, DC coupled (diff. LVDS), Zdiff= 110Ω.

*Mechanical specifications:*

AMP 3-102203-4 connector

#### 2.4.4. Digital I/O connectors

*Function:* N.16 programmable differential LVDS I/O signals, Zdiff\_in= 110 Ohm. Four Independent signal group 0÷3, 4÷7, 8÷11, 12÷15, In / Out direction control; see also § 3.6.

*Mechanical specifications:*

3M-7634-5002- 34 pin Header Connector

#### 2.4.5. Optical LINK connector

*Mechanical specifications:*

LC type connector; to be used with Multimode 62.5/125µm cable with LC connectors on both sides; not featured on Mod. V1724LC

*Electrical specifications:*

Optical link for data readout and slow control with transfer rate up to 80MB/s; daisy chainable.

### 2.5. Other front panel components

#### 2.5.1. Displays

The front panel hosts the following LEDs:

Table 2.2 : Front panel LEDs

Name:	Colour:	Function:
DTACK	green	VME read/write access to the board
CLK_IN	green	External clock enabled.
NIM	green	Standard selection for CLK I/O (V1724LC Rev.0), TRG OUT, TRG IN, S IN.
TTL	green	Standard selection for CLK I/O (V1724LC Rev.0), TRG OUT, TRG IN, S IN.
LINK	green/yellow	Network present; Data transfer activity
PLL_LOCK	green	The PLL is locked to the reference clock
PLL_BYPS	green	The reference clock drives directly ADC clocks; the PLL circuit is switched off and the PLL_LOCK LED is turned off.
RUN	green	RUN bit set (see § 4.19)
TRG	green	Trigger accepted
DRDY	green	Event/data (depending on acquisition mode) are present in the Output Buffer
BUSY	red	All the buffers are full
OUT_LVDS	green	Signal group OUT direction enabled.

### 2.6. Internal components

**SW2..5 “Base Address [31:16]”:** Type: 4 rotary switches

*Function:* Set the VME base address of the module.

**SW1 “CLOCK SOURCE”**


Type Dip Switch

*Function:* Select clock source (External or Internal)

**JP2 “FW”**

Type: Jumper.

*Function:* it allows to select whether the “Standard” or the “Back up” firmware must be loaded at power on; (default position: STD).

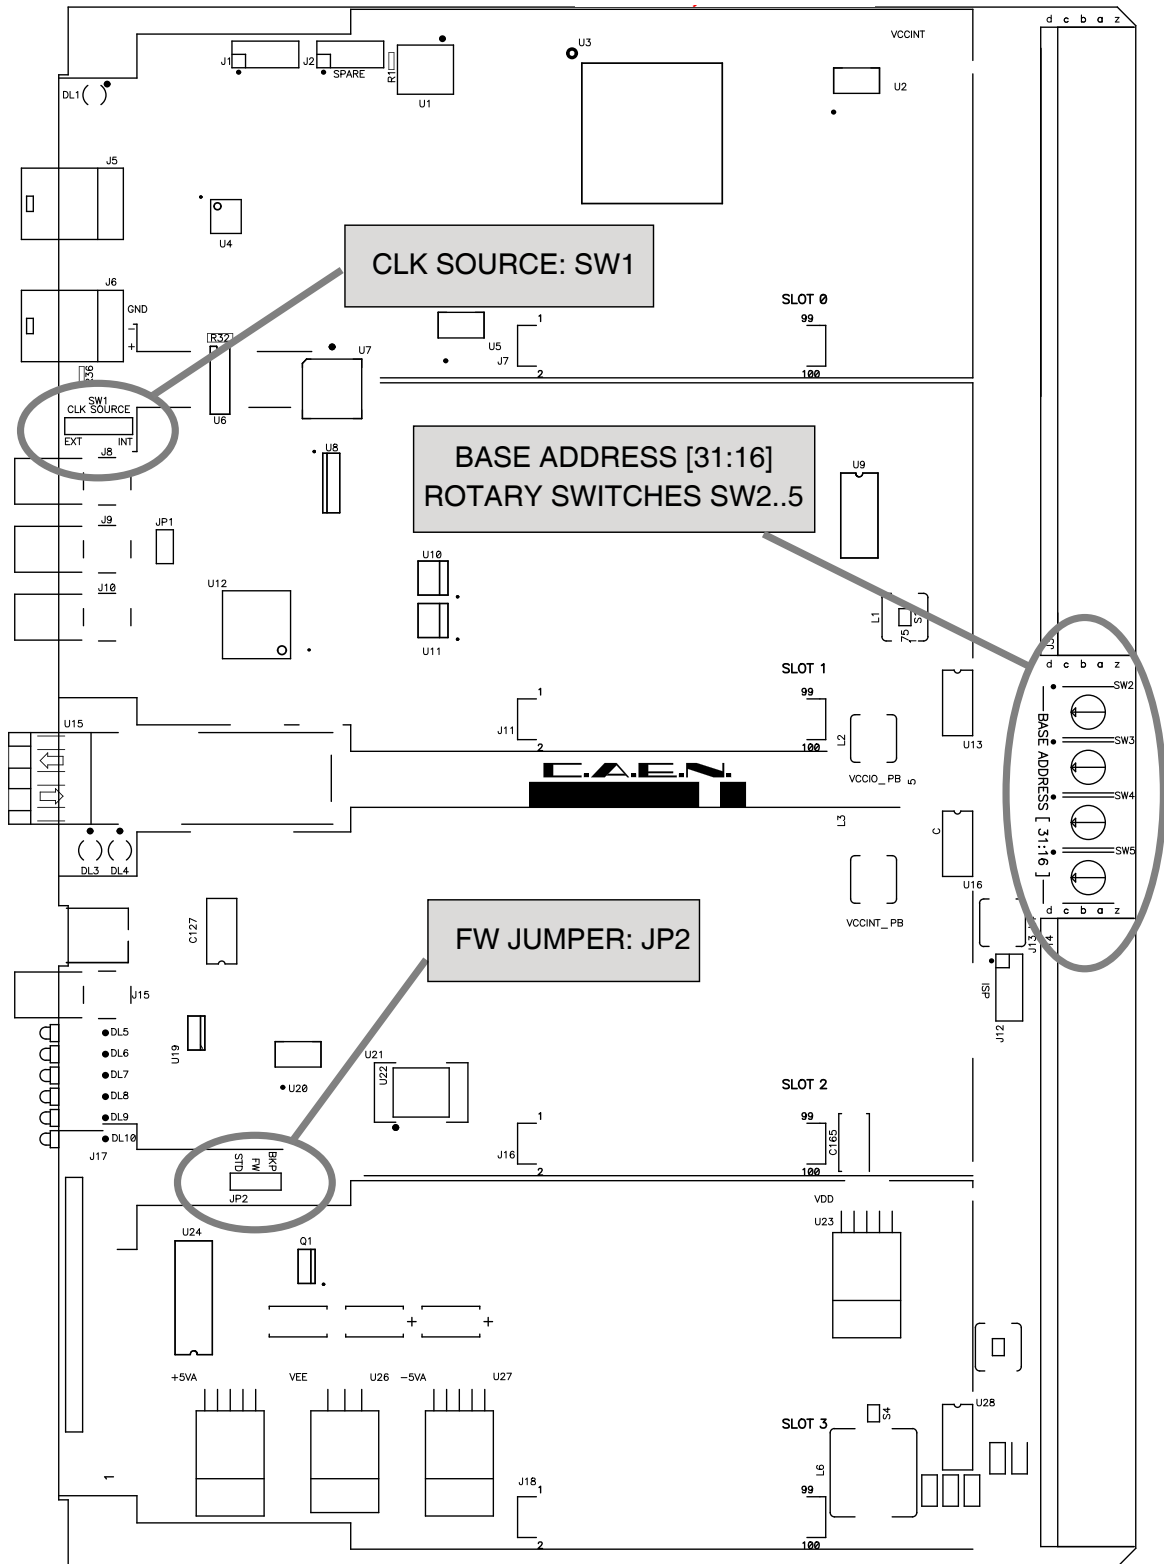

**Fig. 2.3: Rotary and dip switches location**

## 2.7. Technical specifications table

**Table 2.3 : Mod. V1724 technical specifications**

<b>Package</b>	1-unit wide VME 6U module
<b>Analog Input</b>	8 channels, single-ended or differential (depending on version); 2.25Vpp (10Vpp Single-ended on request) input range, positive or negative; 40MHz Bandwidth; Programmable DAC for Offset Adjust on each channel (Single-ended versions only).
<b>Digital Conversion</b>	Resolution: 14 bit Sampling rate: 10 MS/s to 100 MS/s simultaneously on each channel Multi board synchronisation (one board can act as clock master). External Gate Clock capability (NIM / TTL) by S_IN input connector, for burst or single sampling mode.
<b>ADC Sampling Clock generation</b>	The V1724 sampling clock generation supports three operating modes: - PLL mode - internal reference (50 MHz local oscillator) - PLL mode - external reference on CLK_IN. Frequency: 50MHz 100ppm (Other reference frequency values are available in 10 ÷ 100MHz range.) - PLL Bypass mode: External clock on CLK_IN drives directly ADC clocks. External clock Frequency from 10 to 100MHz.
<b>CLK_IN</b>	AC coupled differential input clock LVDS, ECL, PECL, LVPECL, CML (single ended NIM / TTL is also possible via custom CAEN cable).
<b>CLK_OUT</b>	DC coupled differential LVDS output clock, locked to ADC sampling clock. Frequency values in 10 ÷ 100MHz range are available.
<b>Memory Buffer</b>	512K sample/ch or 4M sample/ch (see § 1.1); Multi Event Buffer with independent read and write access. Programmable event size and pre-post trigger. Divisible into 1 ÷ 1024 buffers
<b>Trigger</b>	Common External TRGIN (NIM or TTL) and VME Command Individual channel autotrigger (time over/under threshold) TRGOUT (NIM or TTL) for the trigger propagation to other V1724 boards
<b>Trigger Time Stamp</b>	32bit – 10ns (43s range). Sync input for Time Stamp alignment
<b>AMC FPGA</b>	One Altera Cyclone EP1C4 or EP1C20 per channel
<b>Optical Link</b>	Data readout and slow control with transfer rate up to 80 MB/s, to be used instead of VME bus. Daisy chainable: one A2818 PCI card can control and read eight V1724 boards in a chain (not available on Mod. V1724LC).
<b>VME interface</b>	VME64X compliant D32, BLT32, MBLT64, CBLT32/64, 2eVME, 2eSST, Multi Cast Cycles Transfer rate: 60MB/s (MBLT64), 100MB/s (2eVME), 160MB/s (2eSST) Sequential and random access to the data of the Multi Event Buffer The Chained readout allows to read one event from all the boards in a VME crate with a BLT access
<b>Upgrade</b>	V1724 firmware can be upgraded via VME
<b>Software</b>	General purpose C Libraries and Demo Programs (CAENScope)
<b>Analog Monitor</b> (not available in V1724LC)	12bit / 100MHz DAC controlled by ROC FPGA, supports five operating modes: - Waveform Generator: 1 Vpp ramp generator - Majority: MON/Σ output signal is proportional to the number of ch. under/over threshold (1 step = 125mV) - Analog Inspection: data stream from one channel ADC drives directly the DAC input producing the channel input signal (1 Vpp) - Buffer Occupancy: MON/Σ output signal is proportional to the Multi Event Buffer Occupancy: 1 buffer ~ 1mV - Voltage level: MON/Σ output signal is a programmable voltage level
<b>LVDS I/O</b>	16 general purpose LVDS I/O controlled by the FPGA Busy, Data Ready, Memory full, Individual Trig-Out and other function can be programmed An Input Pattern from the LVDS I/O can be associated to each trigger as an event marker

## 3. Functional description

### 3.1. Analog Input

The module is available either with single ended (on MCX connector) or, on request, differential (on Tyco MODU II 3-pin connector) input channels.

#### 3.1.1. Single ended input

Input dynamic is 2,25Vpp ( $Z_{in} = 50 \Omega$ ). 10Vpp ( $Z_{in} = 1K\Omega$ ) dynamic is available on request. A 16bit DAC allow to add up to  $\pm 1.125V$  ( $\pm 5V$  with high-range input) DC offset in order to preserve the full dynamic range also with unipolar positive or negative input signals.

The input bandwidth ranges from DC to 40 MHz (with 2nd order linear phase anti-aliasing low pass filter).

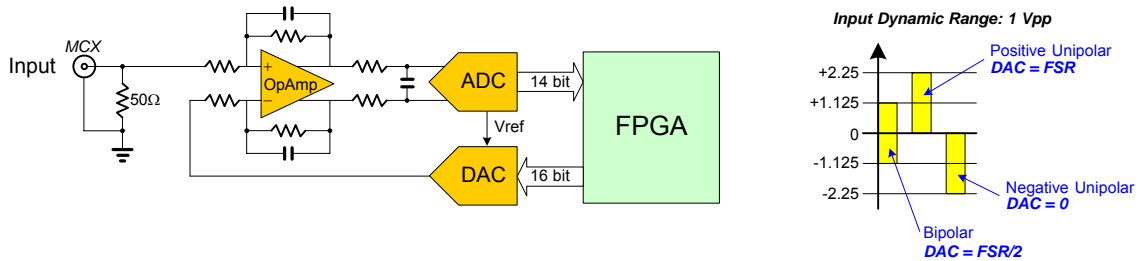


Fig. 3.1: Single ended input diagram

#### 3.1.2. Differential input

Input dynamics is  $\pm 1.125V$  ( $Z_{in} = 50 \Omega$ ).

The input bandwidth ranges from DC to 40 MHz (with 2nd order linear phase anti-aliasing low pass filter).


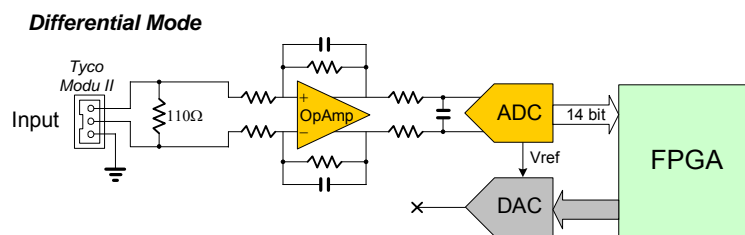


Fig. 3.2: Differential input diagram



## 3.2. Clock Distribution

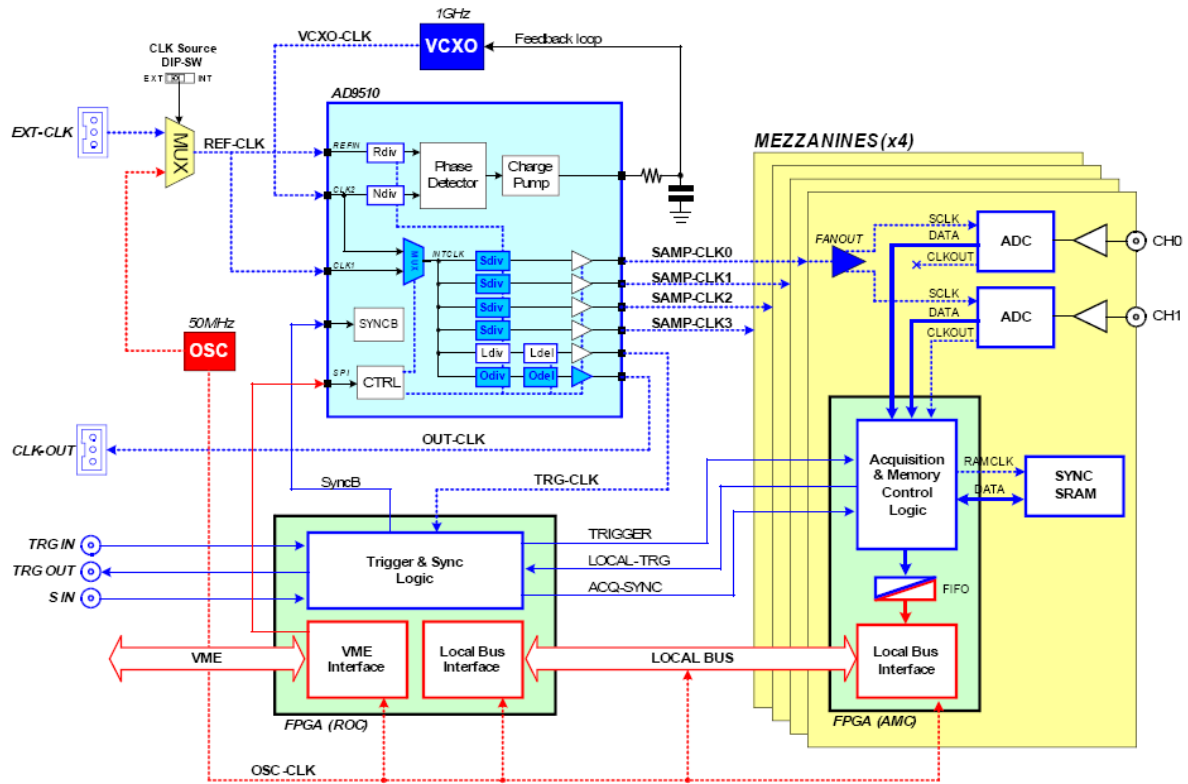

**Fig. 3.3: Clock distribution diagram**

The module clock distribution takes place on two domains: OSC-CLK and REF-CLK; the former is a fixed 50MHz clock provided by an on board oscillator, the latter provides the ADC sampling clock.

OSC-CLK handles both VME and Local Bus (communication between motherboard and mezzanine boards; see red traces in the figure above).

REF-CLK handles ADC sampling, trigger logic, acquisition logic (samples storage into RAM, buffer freezing on trigger) through a clock chain. Such domain can use either an external (via front panel signal) or an internal (via local oscillator) source (selection is performed via dip switch SW1, see § 2.6); in the latter case OSC-CLK and REF-CLK will be synchronous (the operation mode remains the same anyway).

REF-CLK is processed by AD9510 device, which delivers 6 clock out signals; 4 signals are sent to ADCs, one to the trigger logic and one to drive CLK-OUT output (refer to AD9510 data sheet for more details:

[http://www.analog.com/UploadedFiles/Data\\_Sheets/AD9510.pdf](http://www.analog.com/UploadedFiles/Data_Sheets/AD9510.pdf)); two operating modes are foreseen: **Direct Drive Mode** and **PLL Mode**

### 3.2.1. Direct Drive Mode

The aim of this mode is to drive externally the ADCs' Sampling Clock; generally this is necessary when the required sampling frequency is not a VCXO frequency submultiple. The only requirement over the SAMP-CLK is to remain within the ADCs' range.

---

### 3.2.2. **PLL Mode**

The AD9510 features an internal Phase Detector which allows to couple REF-CLK with VCXO (1 GHz frequency); for this purpose it is necessary that REF-CLK is a submultiple of 1 GHz.

AD9510 default setting foresees the board internal clock (50MHz) as clock source of REF-CLK.

This configuration leads to  $Ndiv = 100$ ,  $Rdiv = 5$ , thus obtaining 10MHz at the Phase Detector input and  $CLK-INT = 1GHz$ .

The required 100 MHz Sampling Clock is obtained by processing CLK-INT through Sdiv dividers.

When an external clock source is used, if it has 50MHz frequency, then AD9510 programming is not necessary, otherwise Ndiv and Rdiv have to be modified in order to achieve PLL lock.

A REF-CLK frequency stability better than 100ppm is mandatory.

---

### 3.2.3. **Trigger Clock**

TRG-CLK signal has a frequency equal to  $\frac{1}{2}$  of SAMP-CLK; therefore a 2 samples "uncertainty" occurs over the acquisition window.

---

### 3.2.4. **Output Clock**

Front panel Clock Output is User programmable. Odiv and Odel parameters allows to obtain a signal with the desired frequency and phase shift (in order to recover cable line delay) and therefore to synchronise daisy chained boards. CLK-OUT default setting is OFF, it is necessary to enable the AD9510 output buffer to enable it.

---

### 3.2.5. **AD9510 programming**

CAEN has developed a software tool which allows to handle easily the clock parameters: CAENPLLConfig is a software tool which allows the PLL management, whenever the module is controlled through a CAEN VME Controller

(see <http://www.caen.it/nuclear/function1.php?fun=vmecont> ).

The tool is developed through open source classes wxWidgets v.2.6.3

(see <http://www.wxwidgets.org/> )

and requires the CAENVMETool API's to be installed

(they can be downloaded at <http://www.caen.it/nuclear/lista-sw.php?mod=V1718> with the *SW package for CAEN VME Bridges & Slave Boards*).

CAENPLLConfig is available at: <http://www.caen.it/nuclear/lista-sw.php?mod=V1724>

And must be simply run on the PC connected to the used CAEN VME Controller

The User has to select the **board type** and **base address** (in the ADC BOARD field), then the used mode (**PLL** or **Direct Feed/BYPASS** in the INPUT field); see figure below:

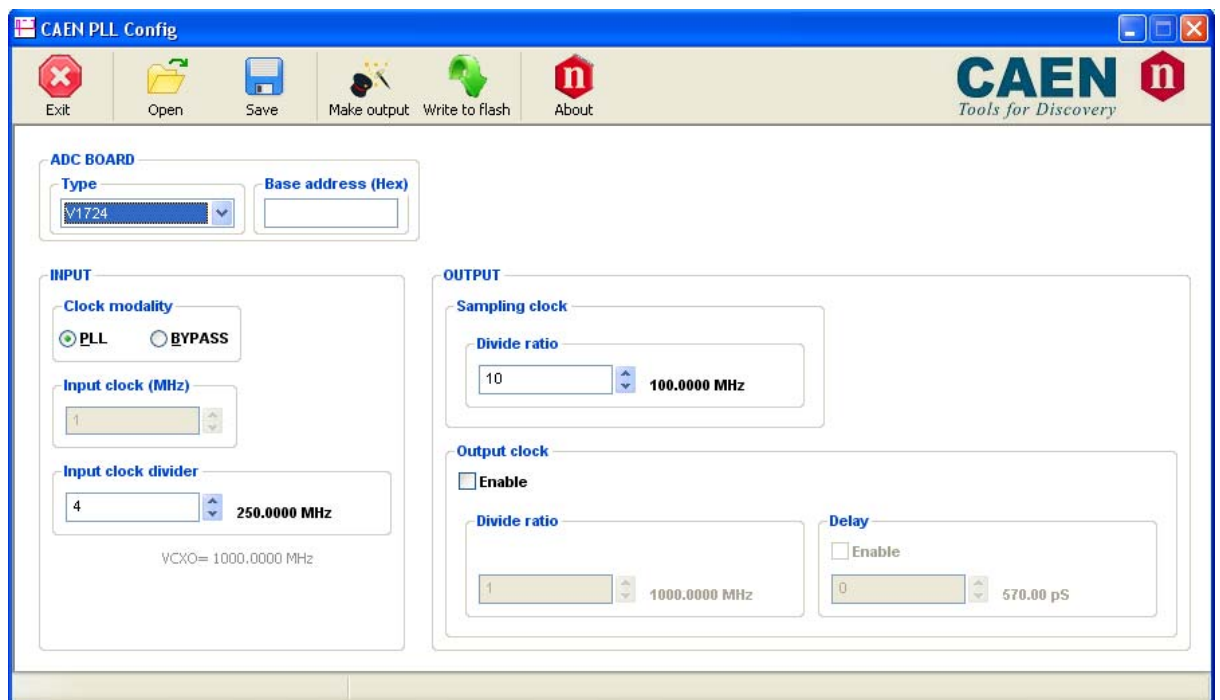


Fig. 3.4: CAENPLLConfig Main menu

---

### 3.2.6. PLL programming

In PLL mode the User has to enter the divider for input clock frequency (**input clock divider** field in CAENPLLConfig Main menu); since the VCXO frequency is 1GHz, in order to use, for example, a 50MHz ExtClk, the divider to be entered is 20.

Then it is necessary to set the parameters for sampling clock and CLK\_OUT (**enable**, **divide ratio** and **phase shift/delay** in **Output Clock** field of CAENPLLConfig Main menu); the tool refuses wrong settings for such parameters.

---

### 3.2.7. Direct Drive programming

In Direct Drive/BYPASS mode, the User can directly set the input frequency (**Input Clock** field, real values are allowed). Given an input frequency, it is possible to set the parameters in order to provide the required signals.

---

### 3.2.8. Configuration file

Once all parameters are set, the tool allows to save the configuration file which includes all the AD9510 device settings (**SAVE** button in the upper toolbar of CAENPLLConfig Main menu). It is also possible to browse and load into the AD9510 device a pre existing configuration file (**OPEN** button in the upper toolbar of CAENPLLConfig Main menu). For this purpose it is not necessary the board power cycle.

---

### **3.2.9. Multiboard synchronisation**

More boards can work synchronously, using an external clock source. Synchronisation can be achieved either by daisy chaining the boards or by using a fan out unit as clock distributor.

In both cases the REF-CLK signal is common to all boards. When dividers are used, it is possible that, on different boards, the corresponding clock signals have different phases, although the dividers have the same value.

The alignment of dividers output can be recovered by using the BSYNC signal, on whose edge all dividers are aligned (this operation is automatically performed at each reset on a single board); if more boards are used, it is necessary to synchronise ALL the BSYNC signals, through the S-IN front panel input. For this purpose, the S-IN signal must be synchronised with EXT-CLK.

In order to ensure that also acquisition windows are aligned, it is necessary that also TRG-IN is synchronised with EXT-CLK. Also edges must coincide in order to have alignment between triggers and buffers.

---

### **3.2.10. Internal clock**

The board can work using the internal 50 MHz Local Oscillator as clock source. This source is processed by the clock distribution electronics (AD9510 chip), which delivers the 100 MHz Sampling Clock to the ADCs. The 100 MHz Sampling Clock is fed also to the FPGA ROC (in order to allow trigger synchronisation, see also Fig. 1.1) and to CLK\_OUT (processed by a programmable divider and phase adjustment). Clock source (internal or external) is selected via internal switch SW1 (see § 2.6).

---

### **3.2.11. External clock and multiboard synchronisation**

The board can work providing an external clock source (10÷100 MHz range). This source is processed by the clock distribution electronics (AD9510 device), which delivers the 100 MHz Sampling Clock to the ADCs. The 100 MHz Sampling Clock is fed also to the FPGA ROC (in order to allow trigger synchronisation) and to CLK\_OUT (processed by a programmable divider and phase adjustment). It is possible to adjust frequency and phase of CLK\_OUT and use such signal as clock source for another board, and so on, in order to have the same clock source for all the boards.

Synchronisation is achieved, besides having the same clock source for all the boards, with all the boards sharing the same trigger signal (TRG\_IN), and a common synchronisation (S\_IN) signal: the latter is necessary in order to avoid a one Sampling Clock period jitter.

---

## **3.3. Acquisition Modes**

---

### **3.3.1. Acquisition run/stop**

The acquisition can be started in two ways, according to Acquisition Control register Bits [1:0] setting (see § 4.17):

- setting the RUN/STOP bit (bit[2]) in the Acquisition Control register (bits [1:0] of Acquisition Control must be set to REGISTER-CONTROLLED RUN MODE or S-IN CONTROLLED RUN MODE)
- driving S\_IN signal high (bits [1:0] of Acquisition Control must be set to 01)

Subsequentially acquisition is stopped either:

- resetting the RUN/STOP bit (bit[2]) in the Acquisition Control register (bits [1:0] of Acquisition Control must be set to REGISTER-CONTROLLED RUN MODE or S-IN CONTROLLED RUN MODE)
- driving S\_IN signal low (bits [1:0] of Acquisition Control set to 01)

### 3.3.2. Gate and Sample mode acquisition

It is possible to use the S\_IN signal (see § 2.4.2) as “gate” to enable samples storage. The samples produced by the 100 MHz ADC are stored in memory only if they are validated by the S\_IN signal, otherwise they are rejected; data storage takes place by couples of samples (two 32 bit long words) per time. Two operating modes are foreseen, as decrbed in the following.

#### 3.3.2.1. Gate mode

In Gate mode all the values sampled as the S-IN signal is active (high) are stored; for this purpose it is necessary to:

Set bits [1:0] of Acquisition Control register to S-IN GATE MODE

Set bit [0] of Channel Configuration Register (see § 4.12) to 0

All the values sampled as the S-IN signal is active (high) are stored.

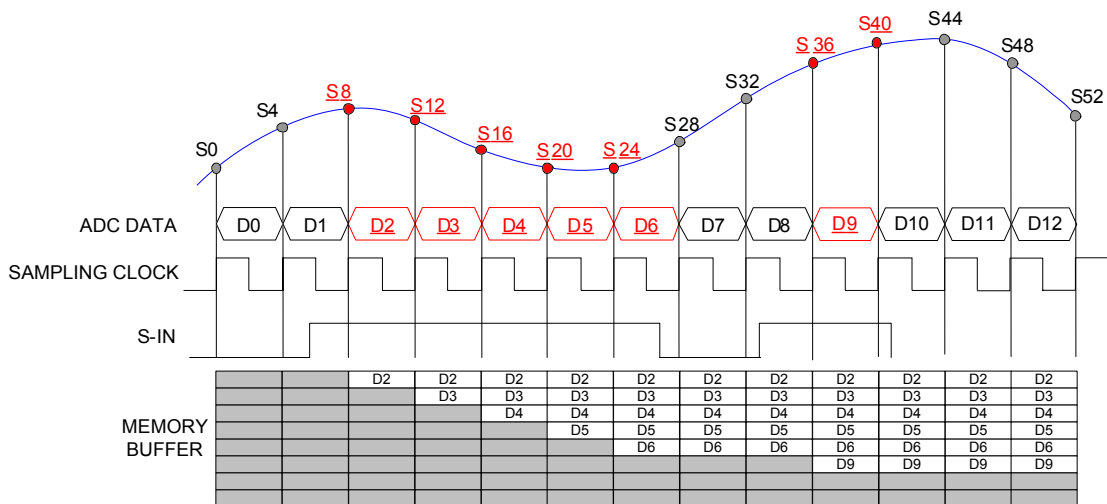


Fig. 3.5: Data Storage<sup>1</sup> in Gate mode


<sup>1</sup> Underscored = stored

### 3.3.3. Sample mode

In Sample mode only the first value sampled after the S-IN signal leading edge is stored; ; data storage takes place by couples of samples (two 32 bit long words) per time. For this purpose it is necessary to:

- Set bits [1:0] of Acquisition Control register to S-IN GATE MODE
- Set bit [0] of Channel Configuration Register (see § 4.12) to 1

Note that, if the S-IN signal is not synchronised with the sampling clock, then a 1 clock period jitter occurs between the S-IN leading edge and the actual sampling time.

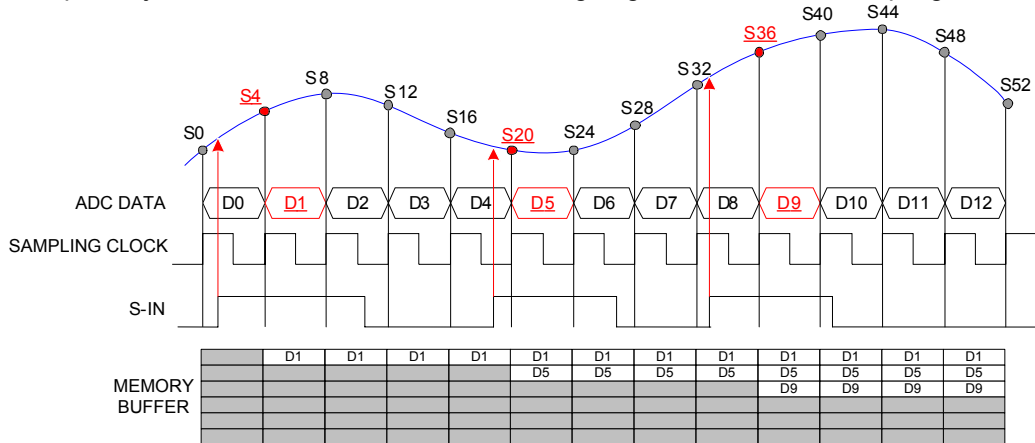

**Fig. 3.6: Data storage<sup>2</sup> in Sample Mode**

### 3.3.4. Acquisition Triggering: Samples and Events

When the acquisition is running, a trigger signal allows to:

- store a Trigger Time Tag (TTT): the value of a 32 bit counter which steps on with the sampling clock and represents a time reference
- increment the EVENT COUNTER (see § 4.29)
- fill the active buffer with the pre/post-trigger samples, whose number is programmable via Post Trigger Setting register (see § 4.23); the Acquisition window width is determined via Buffer Organization register setting (see § 4.15.); then the buffer is frozen for readout purposes, while acquisition continues on another buffer.

**Table 3.1: Buffer Organization**

REGISTER (see § 4.15)	BUFFER NUMBER	SIZE of one BUFFER (samples)	
		SRAM 1MB/ch (512KS)	SRAM 8MB/ch (4MS)
0x00	1	512K	4M
0x01	2	256K	2M
0x02	4	128K	1M
0x03	8	64K	512K
0x04	16	32K	256K
0x05	32	16K	128K
0x06	64	8K	64K
0x07	128	4K	32K
0x08	256	2K	16K
0x09	512	1K	8K
0x0A	1024	512	4K


<sup>2</sup> Underscored = stored

An event is therefore composed by the trigger time tag, pre- and post-trigger samples and the event counter.

Overlap between “acquisition windows” may occur (a new trigger occurs while the board is still storing the samples related to the previous trigger); this overlap can be either rejected or accepted (programmable via VME).

If the board is programmed to accept the overlapped triggers, as the “overlapping” trigger arrives, the current active buffer is filled up, then the samples storage continues on the subsequent one.

In this case events will not have all the same size (see figure below).

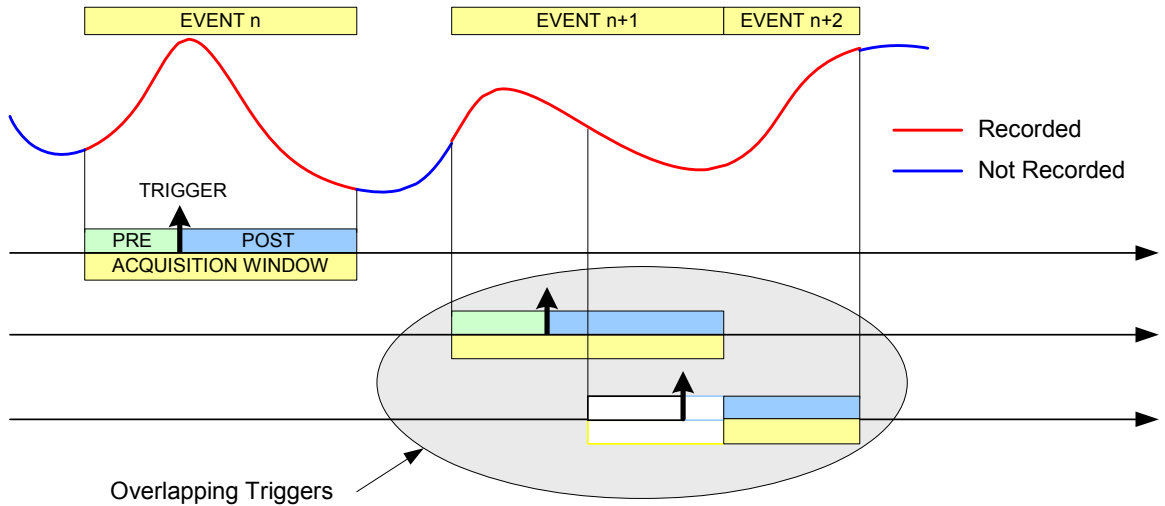

**Fig. 3.7: Trigger Overlap**

A trigger can be refused for the following causes:

- acquisition is not active
- memory is FULL and therefore there are no available buffers
- the required number of samples for building the pre-trigger of the event is not reached yet; this happens typically as the trigger occurs too early either with respect to the RUN\_ACQUISITION command (see § 3.3.1) or with respect to a buffer emptying after a MEMORY\_FULL status
- the trigger overlaps the previous one and the board is not enabled for accepting overlapped triggers

As a trigger is refused, the current buffer is not frozen and the acquisition continues writing on it. The Event Counter can be programmed in order to be either incremented or not. If this function is enabled, the Event Counter value identifies the number of the triggers sent (but the event number sequence is lost); if the function is not enabled, the Event Counter value coincides with the sequence of buffers saved and readout.

### 3.3.4.1. Custom size events

It is possible to make events with a number of Memory locations, which depends on Buffer Organization register setting (see § 4.15) smaller than the default value. One memory location contains two ADC samples and the maximum number of memory locations  $N_{LOC}$  is therefore half the maximum number of samples per block  $NS = 512K/Nblocks$ .

Smaller  $N_{LOC}$  values can be achieved by writing the number of locations  $N_{LOC}$  into the Custom Size register (see § 4.17).

$N_{LOC} = 0$  means "default size events", i.e. the number of memory locations is the maximum allowed.

$N_{LOC} = N1$ , with the constraint  $0 < N1 < \frac{1}{2}NS$ , means that one event will be made of  $2 \cdot N1$  samples.

### 3.3.5. Event structure

An event is structured as follows:

- identifier (Trigger Time Tag, Event Counter)
- samples caught in the acquisition windows

The event is stored in the board memories and can be readout via VME; data format is 32 bit long word, therefore each long\_word contains 2 samples.

The event format is the following:

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1 0 1 0				EVENT SIZE																								HEADER			
BOARD-ID				reserved				PATTERN												CHANNEL MASK				DATA CH0							
reserved				EVENT COUNTER																											
TRIGGER TIME TAG																															
0 0		SAMPLE [1] - CH[0]												0 0		SAMPLE [0] - CH[0]												DATA CH1			
0 0		SAMPLE [3] - CH[0]												0 0		SAMPLE [2] - CH[0]															
...																															
0 0		SAMPLE [N-1] - CH[0]												0 0		SAMPLE [N-2] - CH[0]												DATA CH7			
0 0		SAMPLE [1] - CH[1]												0 0		SAMPLE [0] - CH[1]															
0 0		SAMPLE [3] - CH[1]												0 0		SAMPLE [2] - CH[1]															
...																															
0 0		SAMPLE [N-1] - CH[1]												0 0		SAMPLE [N-2] - CH[1]															
...																															
0 0		SAMPLE [1] - CH[7]												0 0		SAMPLE [0] - CH[7]															
0 0		SAMPLE [3] - CH[7]												0 0		SAMPLE [2] - CH[7]															
...																															
0 0		SAMPLE [N-1] - CH[7]												0 0		SAMPLE [N-2] - CH[7]															

**Table 3.2 : Event Organization**

#### Header

It is composed by four words, namely:

- Size of the event (number of 32 bit long words)
- Board ID (GEO); a 16 bit pattern, latched on the LVDS I/O as one trigger arrives (see § 4.25); Channel Mask (=1: channels participating to event; ex CH5 and CH7 participating → Ch Mask: 0xA0, this information must be used by the software to acknowledge which channel the samples are coming from)
- Event Counter: It is the trigger counter; it can count either accepted triggers only, or all triggers (see § 4.17).
- Trigger Time Tag: It is a 32 bit counter (31 bit count + 1 overflow bit), which is reset either as acquisition starts or via front panel Reset signal (see § 3.8), and is incremented at each sampling clock hit. It is the trigger time reference.

#### Samples

Stored samples; data from masked channels are not read.



---

### **3.3.6. Memory FULL management**

Bit5 of Acquisition Control register (see § 4.17), allows to select Memory FULL management mode:

In Normal Mode the board becomes full, whenever all buffers are full (see § 4.15); otherwise (“Always one buffer free” mode) it is possible to always keep one buffer free: board becomes full, whenever N-1 buffers are full; with N = nr. of blocks (see § 4.15).

In Normal Mode, the board waits until one buffer is filled since FULL status is exited (whether the trigger is overlapped or not). The board exits FULL status at the moment which the last datum from the last channel participating to the event is read.

In “Always one buffer free” mode, one buffer cannot be used (therefore it is NOT POSSIBLE, with this mode, to set Buffer Code to 0000; see § 4.15), but this allows to eliminate dead time when FULL status is exited.

---

## **3.4. Zero suppression**

The board implements three algorithms of “Zero Suppression” and “Data Reduction”

- Full Suppression based on the integral of the signal (ZS\_INT),
- Full Suppression based on the signal amplitude (ZS\_AMP),
- Zero Length Encoding (ZLE),

The algorithm to be used is selected via Control register, and its configuration takes place via two more registers (CHANNEL n ZS\_THRES and CHANNEL n ZS\_NSAMP).

It must be noticed that one datum (32 bit long word) contains 2 samples: therefore one datum is considered over threshold as at least one sample reaches (or exceeds) the threshold.

As a consequence, one datum is considered under threshold as both samples remain smaller than the threshold.

---

### **3.4.1. Zero Suppression Algorithm**

#### **3.4.1.1. Full Suppression based on the integral of the signal**

Full Suppression based on the integral of the signal allows to discard a full event if the sum of all the samples in the event is smaller than the threshold set by the User (see § 4.3).

It is also possible to configure the algorithm with “negative” logic: in this case the event is discarded if the sum of all the samples in the event is higher than the threshold set by the User (see § 4.3).

#### **3.4.1.2. Full Suppression based on the amplitude of the signal**

Full Suppression based on the signal amplitude allows to discard a full event if the signal does not exceed the programmed threshold for Ns subsequent data at least (Ns is programmable, see § 4.4).

It is also possible to configure the algorithm with “negative” logic: in this case the event is discarded if the signal does not remain under the programmed threshold for Ns subsequent data at least (see § 4.4).

#### **3.4.1.3. Zero Length Encoding ZLE**

Zero Length Encoding allows to transfer the event in compressed mode, discarding either the data under the threshold set by the User (positive logic) or the data over the threshold set by the User (negative logic).

With Zero length encoding it is also possible to set  $N_{LBK}$  (LOOK BACK), the number of data to be stored before the signal crosses the threshold and/or,  $N_{LFWD}$  (LOOK FORWARD), the number of data to be stored after the signal crosses the threshold (see § 4.3).

In this case the event of each channel has a particular format which allows the construction of the acquired time interval:

- **Total size totale of the event (total number of transferred data)**
- **Control word**
- [stored valid data, if control word is "good"]
- **Control word**
- [stored valid data, if control word is "good"]
- ...

The total size is the number of 32 bit data that compose the event (including the size itself).


The control word has the following format:

Bit	Function
[31]	0: skip 1: good
[20:0]	stored/skipped words

If the control word type is "good", then it will be followed by as many data as those indicated in the "stored/skipped words" field; if the control word type is "skip" then it will be followed by a "good" control world, unless the end of event is reached.

**Examples:**


**If the input signal is the following:**

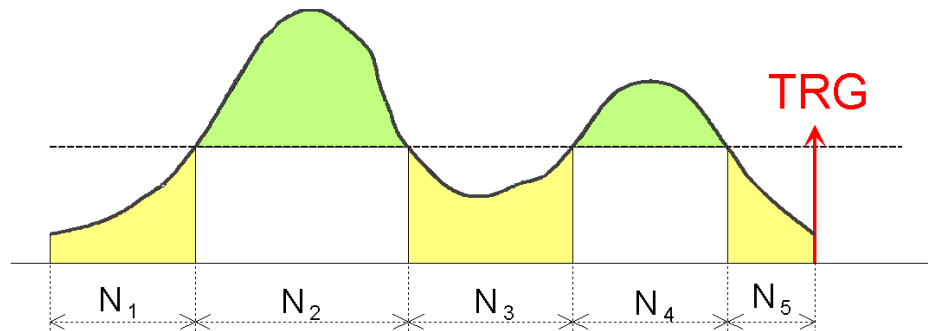

**Fig. 3.8: Zero Suppression example**

If the algorithm works in positive logic, and


- $N_{LBK} < N_1$  ;
- $N_{LFWD} < N_5$  ;
- $N_{LBK} + N_{LFWD} < N_3$  ;

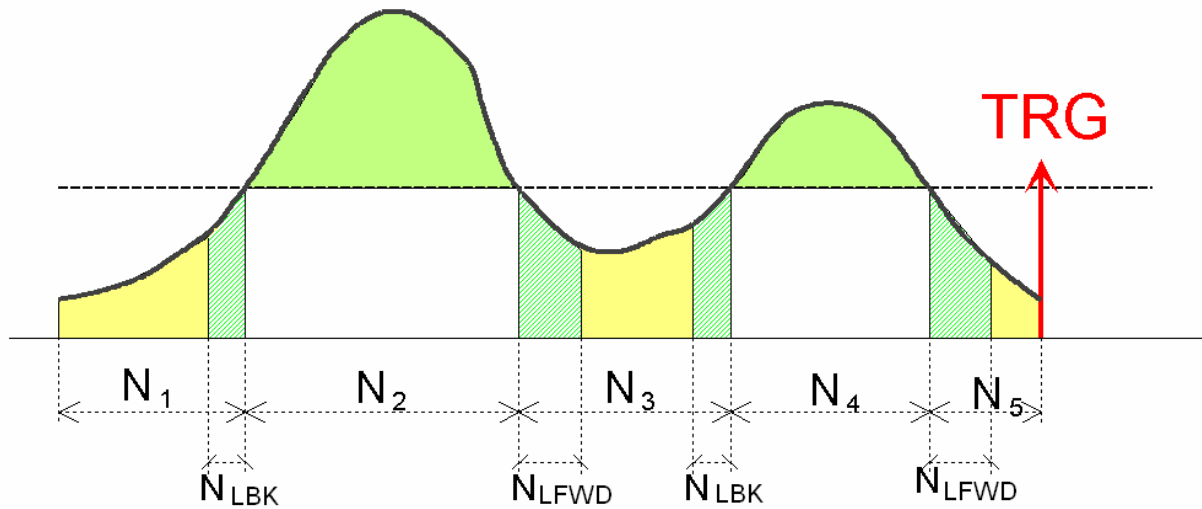

**Fig. 3.9:** Example with positive logic and non-overlapping  $N_{LBK} / N_{LFWD}$

then the readout event is:  
 $N'_2 + N'_4 + 5$  (control words) + 1 (size)  
 Skip  $N_1 - N_{LBK}$   
 Good  $N'_2 = N_{LBK} + N_2 + N_{LFWD}$   
 ...  $N'_2$  words with samples over threshold  
 Skip  $N_3 - N_{LFWD} - N_{LBK}$   
 Good  $N'_4 = N_{LBK} + N_4 + N_{LFWD}$   
 ...  $N'_4$  words with samples over threshold  
 Skip  $N_5 - N_{LFWD}$

If the algorithm works in negative logic, and  
 $N_{LBK} + N_{LFWD} < N_2$ ;  
 $N_{LBK} + N_{LFWD} < N_4$ ;

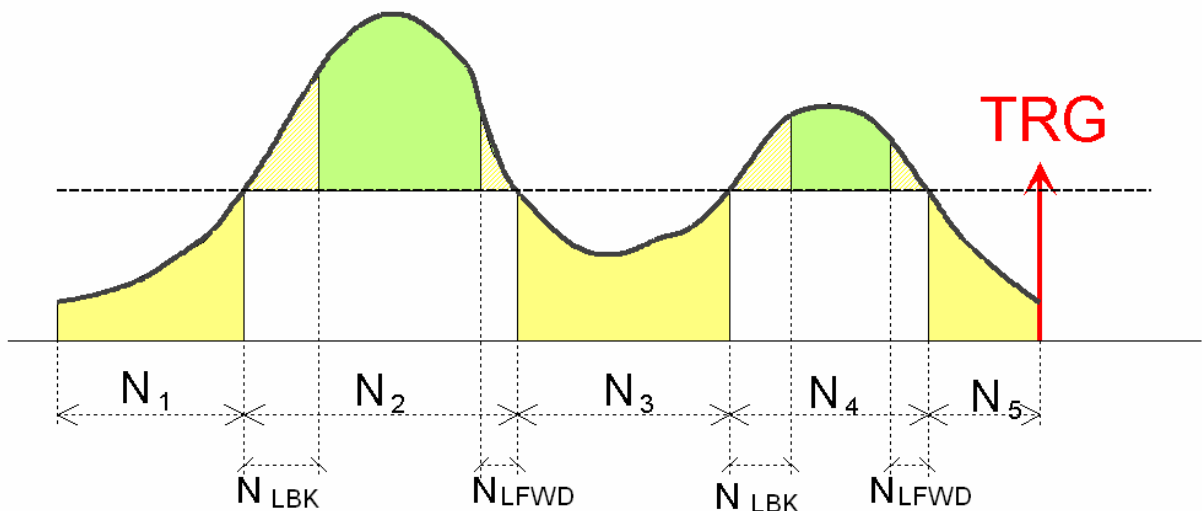


**Fig. 3.10:** Example with negative logic and non-overlapping  $N_{LBK} / N_{LFWD}$

then the readout event is:  
 $N'_1 + N'_3 + N'_5 + 5$  (control words) + 1 (size)  
 Good  $N'_1 = N_1 + N_{LFWD}$   
 ...  $N'_1$  words with samples under threshold  
 Skip  $N_2 - N_{LFWD} - N_{LBK}$   
 Good  $N'_3 = N_{LBK} + N_3 + N_{LFWD}$   
 ...  $N'_3$  words with samples under threshold  
 Skip  $N_4 - N_{LFWD} - N_{LBK}$   
 Good  $N'_5 = N_{LBK} + N_5$   
 ...  $N'_5$  words with samples under threshold

In some cases the number of data to be discarded can be smaller than  $N_{LBK}$  and  $N_{LFWD}$  :

1) If the algorithm works in positive logic, and  
 $N_1 \leq N_{LBK} < N_3$ ;  
 $N_{LFWD} = 0$ ;

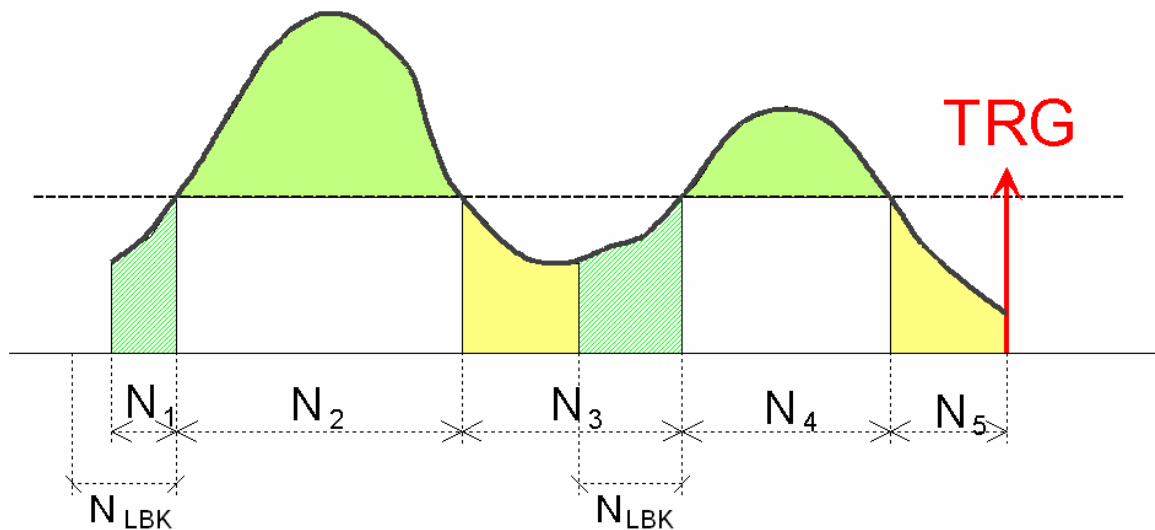

**Fig. 3.11: Example with positive logic and non overlapping  $N_{LBK}$**

then the readout event is:  
 $N_1 + N_2 + N'_4 + 5$  (control words) + 1 (size)  
 Good  $N_1 + N_2$   
 ...  $N_1 + N_2$  words with samples over threshold  
 Skip  $N_3 - N_{LBK}$   
 Good  $N'_4 = N_{LBK} + N_4$   
 ...  $N'_4$  words with samples over threshold  
 Skip  $N_5$


2) If the algorithm works in positive logic, and  
 $N_{LBK} = 0$  ;  
 $N_5 \leq N_{LFWD} < N_3$  ;  
 then the readout event is:  
 $N'_2 + N_4 + N_5 + 5$  (control words) + 1 (size)  
 Skip  $N_1$   
 Good  $N'_2 = N_2 + N_{LFWD}$   
 ...  $N'_2$  words with samples over threshold

Skip  $N_3 - N_{LFWD}$   
 Good  $N_4 + N_5$   
 ...  $N_4 + N_5$  words with samples over threshold

3) If the algorithm works in positive logic, and  
 $N_{LBK} = 0$ ;  
 $N_3 \leq N_{LFWD} < N_5$ ;

then the readout event is:  
 $N'_2 + 3$  (control words) + 1 (size)  
 Skip  $N_1$   
 Good  $N'_2 = N_2 + N_3 + N_4 + N_{LFWD}$   
 ...  $N'_2$  words with samples over threshold  
 Skip  $N_5 - N_{LFWD}$

4) If the algorithm works in positive logic, and  
 $N_3 \leq N_{LBK} < N_1$ ;  
 $N_{LFWD} = 0$ ;

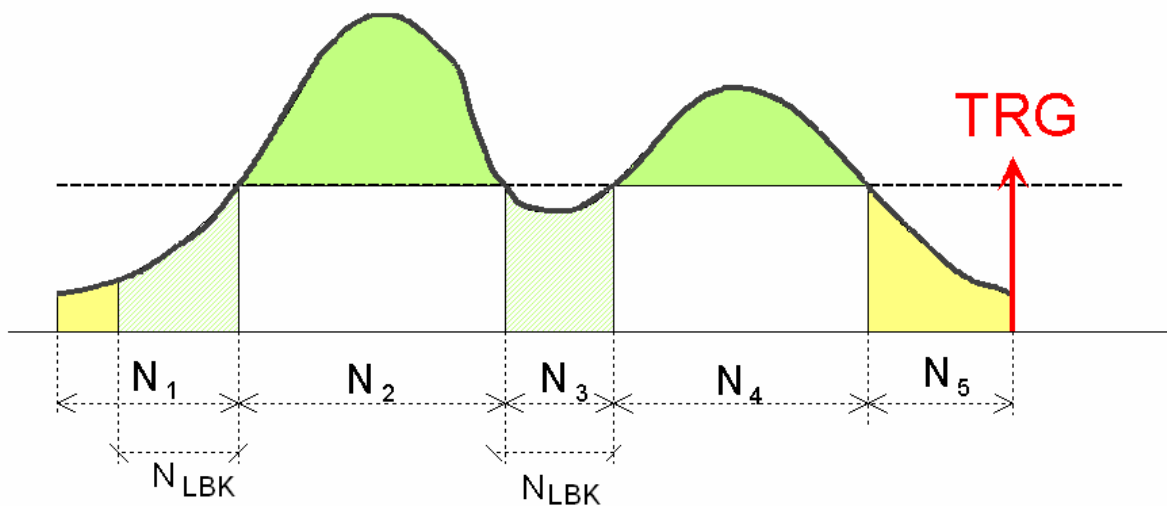

**Fig. 3.12: Example with positive logic and overlapping  $N_{LBK}$**

then the readout event is:  
 $N'_2 + N'_4 + 4$  (control words) + 1 (size)  
 Skip  $N_1 - N_{LBK}$   
 Good  $N'_2 = N_{LBK} + N_2$   
 ...  $N'_2$  words with samples over threshold  
 Good  $N'_4 = N_3 + N_4$   
 ...  $N'_4$  words with samples over threshold  
 Skip  $N_5$   
 N.B: In this case there are two subsequent "GOOD" intervals.

5) If the algorithm works in positive logic, and  
 $0 < N_{LBK} < N_1$ ;  
 $N_{LFWD} < N_5$ ;  
 $N_{LBK} + N_{LFWD} \geq N_3$ .  
 then the readout event is:

$N'_2 + N'_4 + 4$  (control words) + 1 (size)

Skip  $N_1 - N_{LBK}$

Good  $N'_2 = N_{LBK} + N_2 + N_{LFWD}$

...  $N'_2$  words with samples over threshold

Good  $N'_4 = (N_3 - N_{LFWD}) + N_4 + N_{LFWD}$

...  $N'_4$  words with samples over threshold

Skip  $N_5 - N_{LFWD}$

N.B: In this case there are two subsequent "GOOD" intervals.

These examples are reported with positive logic; the compression algorithm is the same also working in negative logic.

### 3.5. Trigger management

All the channels in a board share the same trigger: this means that all the channels store an event at the same time and in the same way (same number of samples and same position with respect to the trigger); several trigger sources are available.

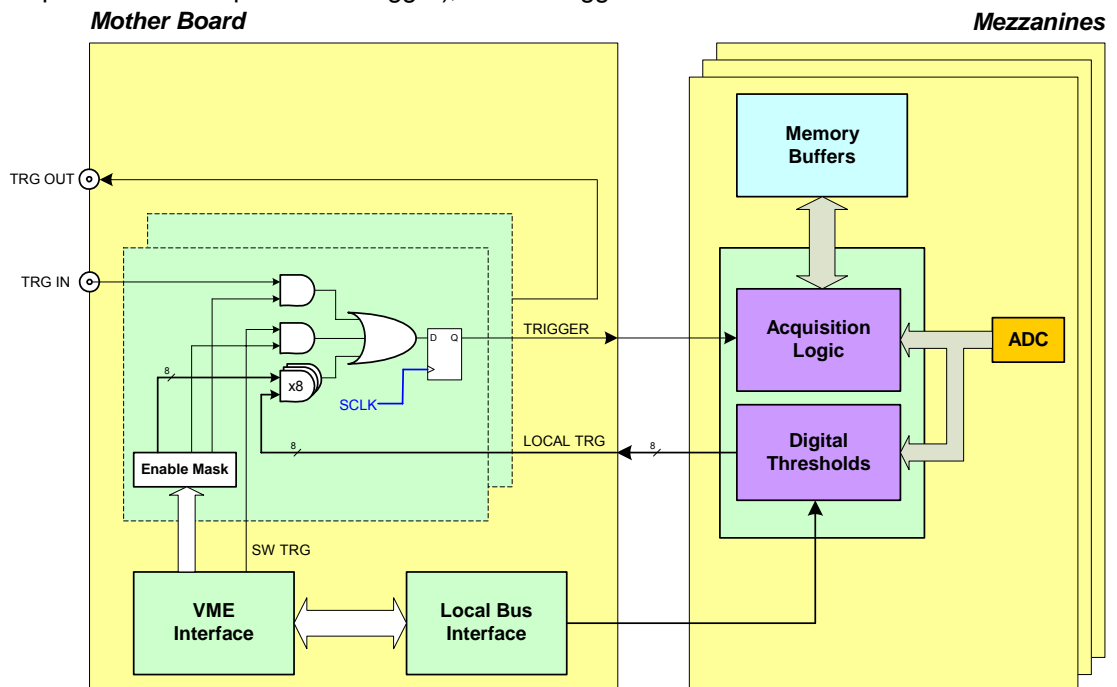


Fig. 3.13: Block diagram of Trigger management

#### 3.5.1. External trigger

External trigger can be NIM/TTL signal on LEMO front panel connector, 50 Ohm impedance. The external trigger is synchronised with the internal clock (see § 3.2.11); if External trigger is not synchronised with the internal clock, a one clock period jitter occurs.


#### 3.5.2. Software trigger

Software trigger are generated via VME bus (write access in the relevant register, see § 4.20).

### 3.5.3. Local channel auto-trigger

Each channel can generate a local trigger as the digitised signal exceeds the  $V_{th}$  threshold (ramping up or down, depending on VME settings), and remains under or over threshold for  $N_{th}$  "quartets" of samples at least ( $N_{th}$  is programmable via VME). The  $V_{th}$  digital threshold, the edge type, and the minimum number  $N_{th}$  of couples of samples are programmable via VME register accesses, see § 4.3 and § 4.6; actually local trigger is delayed of  $N_{th}$  quartets of samples with respect to the input signal.

N.B.: the local trigger signal does not start directly the event acquisition on the relevant channel; such signal is propagated to the central logic which produces the global trigger, which is distributed to all channels (see § 3.5.4).

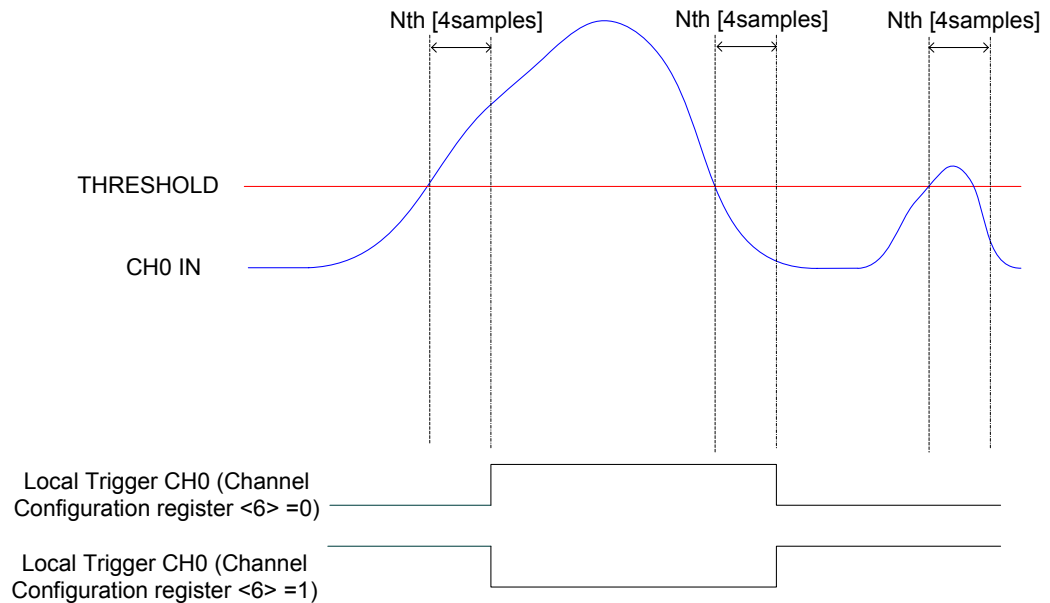

**Fig. 3.14: Local trigger generation**

### 3.5.4. Trigger distribution

The OR of all the enabled trigger sources, after being synchronised with the internal clock, becomes the global trigger of the board and is fed in parallel to all the channels, which store an event.

A Trigger Out is also generated on the relevant front panel TRG\_OUT connector (NIM or TTL), and allows to extend the trigger signal to other boards.

For example, in order to start the acquisition on all the channels in the crate, as one of the channels ramps over threshold, the Local Trigger must be enabled as Trigger Out, the Trigger Out must then be fed to a Fan Out unit; the obtained signal has to be fed to the External Trigger Input of all the boards in the crate (including the board which generated the Trigger Out signal).

## 3.6. Front Panel I/Os

The V1724 is provided with 16 programmable general purpose LVDS I/O signals. Signals can be programmed via VME (see § 4.24 and § 4.25).

Default configuration is:

**Table 3.3 : Front Panel I/Os default setting**

Nr.	Direction	Description
0	out	Ch 0 Trigger Request
1	out	Ch 1 Trigger Request
2	out	Ch 2 Trigger Request
3	out	Ch 3 Trigger Request
4	out	Ch 4 Trigger Request
5	out	Ch 5 Trigger Request
6	out	Ch 6 Trigger Request
7	out	Ch 7 Trigger Request
8	out	Memory Full
9	out	Event Data Ready
10	out	Channels Trigger
11	out	RUN Status
12	in	Trigger Time Tag Reset (active low)
13	in	Memory Clear (active low)
14	-	RESERVED
15	-	RESERVED

---

## 3.7. Analog Monitor

The board houses a 12bit (100MHz) DAC with 0÷1 V dynamics on a 50 Ohm load (see Fig. 1.1), whose input is controlled by the ROC FPGA and the signal output (driving 50 Ohm) is available on the MON/Σ output connector. MON output of more boards can be summed by an external Linear Fan In.

This output is delivered by a 12 bit DAC.

The DAC control logic implements five operating modes:

- Trigger Majority Mode ( Monitor Mode = 0)
- Test Mode (Monitor Mode = 1)
- Analog Monitor/Inspection Mode (Monitor Mode = 2)
- Buffer Occupancy Mode (Monitor Mode = 3)
- Voltage Level Mode (Monitor Mode = 4)

Operating mode is selected via Monitor Mode register (see § 4.32)


**N.B.:** this feature is not available on the Mod. V1724LC

---

### 3.7.1. Trigger Majority Mode (Monitor Mode = 0)

It is possible to generate a Majority signal with the DAC: a voltage signal whose amplitude is proportional to the number of channels under/over (see § 4.12) threshold (1 step = 125mV); this allows, via an external discriminator, to produce a global trigger signal, as the number of triggering channels has exceeded a particular threshold.



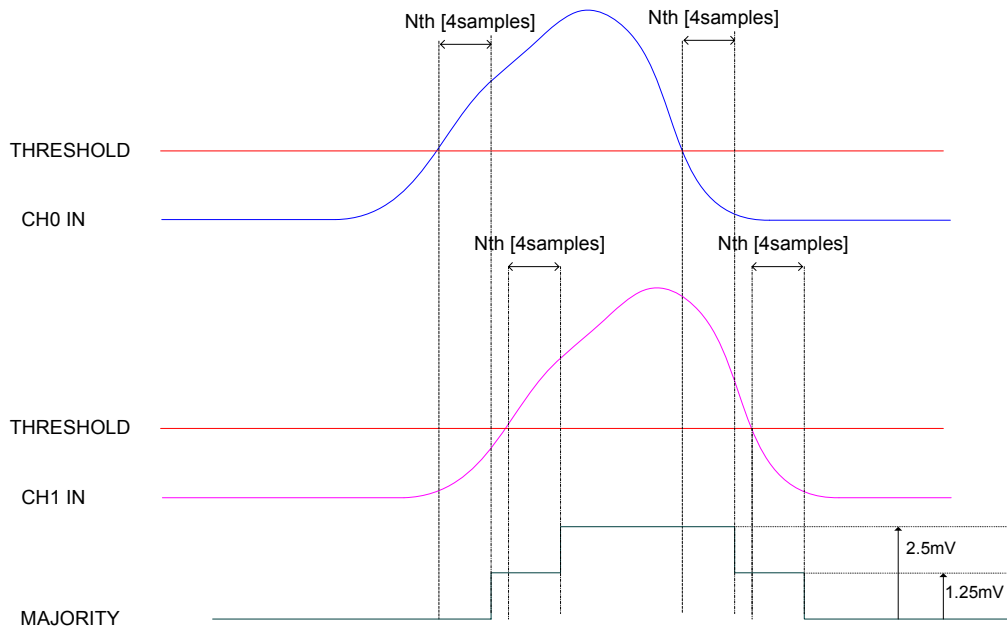

**Fig. 3.15: Majority logic (2 channels over threshold; bit[6] of Ch. Config. Register =0)**


In this mode the MON output provides a signal whose amplitude is proportional to the number of channels over the trigger threshold. The amplitude step (= +1 channel over threshold) is 125mV.

### 3.7.2. Test Mode (Monitor Mode = 1)

In this mode the MON output provides a sawtooth signal with 1 V amplitude and 24.41 Hz frequency.

### 3.7.3. Analog Monitor/Inspection Mode (Monitor Mode = 2)

In this mode the MON output provides a signal whose amplitude is proportional to the sum of the board channels. The following diagram shows the way the channels data are processed.

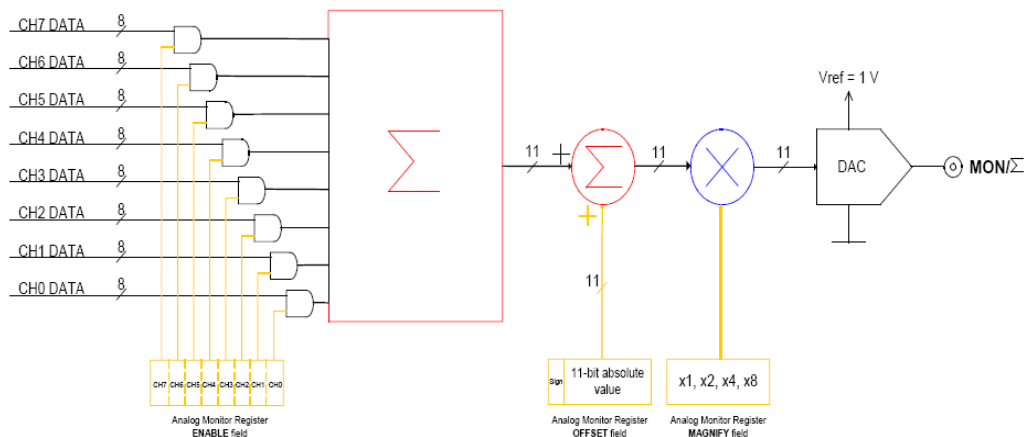

**Fig. 3.16: Inspection Mode diagram**

Data converted by channel ADC are brought to the FPGA via a 2 bit BUS. Data transfer timing is provided by TRG-CLK; the available bandwidth is 200 Mb/s. The FPGA ROC handles 8 bit data. Data rate is ¼ of TRG-CLK. Chx DATA represents the 8 MSB of the converted sample. Data from 8 channels are summed; each channel can be enabled (see Analog Monitor Register at § 4.34) to participate or not to the sum. The sum value is provided on 11 bit; a positive/negative offset (also encoded on 11bit) can be added to the sum (there is a sign bit in the Analog Monitor Register AMR to select offset polarity). The sum value can be multiplied by a fixed factor (MAGNIFY x1, x2, x4, x8). The final result (11 bit dynamics) allows to drive the DAC. The DAC output has 1V dynamics and drives 50 Ohm.

### 3.7.3.1. Procedure to enable “Analog Monitor” mode


In order to enable Analog Monitor mode is necessary to:

- enable the channels to send data to FPGA ROC, by setting to 1 bit 7 of Channel Configuration register (see § 4.12). If this bit is set the datum sent is always 0.
- Configure the Analog Monitor register with the desired settings.
- Enable Analog Monitor mode: set to 2 the Monitor Mode register.

### 3.7.3.2. Applications examples

These examples show the effect of the channel/offset/magnify parameters over MON output.


Single channel amplified on 0-1 V dynamics:

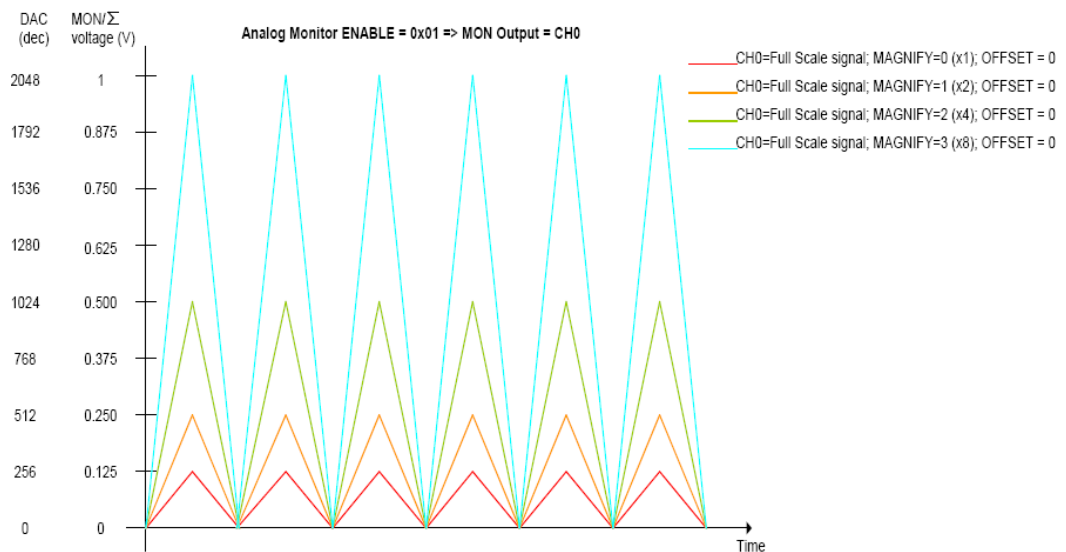

**Fig. 3.17: Example of Magnify parameter use on single channel**

The assumption is an input signal on CH0 using the whole dynamics. Only such channel is enabled for Analog Monitor; the triangular waveform is just as example. FPGA AMC of CH0 sends 8MSB to FPGA ROC with 25 Mhz rate (one sample out of four). If no output is added and MAGNIFY factor 1x, the DAC produces a copy of the signal on channel 0 with 0÷125 mV dynamics (1/8 of DAC dynamics). If a larger dynamics is desired, it is necessary increase MAGNIFY factor; with MAGNIFY 8x one channel covers all the DAC available dynamics.

Channel sum with maximum dynamics:

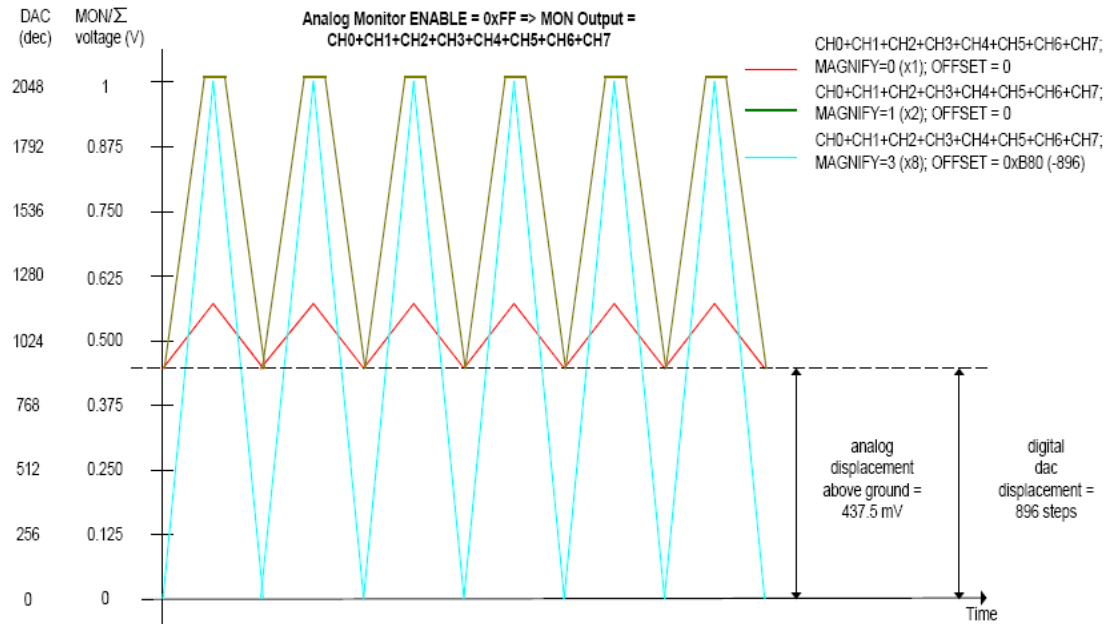

**Fig. 3.18: Example of Magnify and Offset parameters use on single channel**

The assumption is an input signal on CH0 using the whole dynamics and all channels participating to Analog Monitor. The ADC on the mezzanine produces data in the 0÷16383 range (14 bit). All channels have 0 offset and therefore the ADC converted value is 8192. The triangular waveform is shown as an example. The FPGA AMC of channel 0 sends the 8 MSB to FPGA ROC with a 25 Mhz rate (one sample out of four). If no output is added and MAGNIFY factor 1x, the DAC produces a copy of the signal on channel 0 with 125 mV dynamics (1/8 of DAC dynamics) and 500 mV average value. If a larger dynamics is desired, it is necessary to modify OFFSET and MAGNIFY factor: in order to avoid saturation it is necessary to subtract to the channel sum a value equal to the minimum of the channel sum (displacement).

### 3.7.4. Buffer Occupancy Mode (Monitor Mode = 3)

In this mode, MON out provides a voltage value proportional to the number of buffers filled with events; step: 1 buffer = 0.976 mV. .

This mode allows to test the readout efficiency: in fact if the average event readout throughput is as fast as trigger rate, then MON out value remains constant; otherwise if MON out value grows in time, this means that readout rate is slower than trigger rate.

### 3.7.5. Voltage Level Mode (Monitor Mode = 4)

In this mode, MON out provides a voltage value programmable via the 'N' parameter written in the SET MONITOR DAC register, with:  $V_{mon} = 1/4096 * N$  (Volt).

---

## 3.8. Test pattern generator

The FPGA AMC can emulate the ADC and write into memory a ramp (0, 1, 2, 3,...3FFF, 3FFF, 3FFE..., 0) for test purposes. It can be enabled via Channel Configuration register, see § 4.12.

---

## 3.9. Reset, Clear and Default Configuration

---

### 3.9.1. Global Reset

Global Reset is performed at Power ON of the module or via a VME RESET (SYS\_RES), see § 4.44. It allows to clear the data off the Output Buffer, the event counter and performs a FPGAs global reset, which restores the FPGAs to the default configuration. It initialises all counters to their initial state and clears all detected error conditions.

---

### 3.9.2. Memory Reset

The Memory Reset clears the data off the Output Buffer.  
The Memory Reset can be forwarded via either a write access to Software Clear Register (see § 4.45) or with a pulse sent to the front panel Memory Clear input (see § 3.6).

---

### 3.9.3. Timer Reset

The Timer Reset allows to initialize the timer which allows to tag an event. The Timer Reset can be forwarded with a pulse sent to Trigger Time Tag Reset input (see § 3.6).

---

## 3.10. VMEBus interface

The module is provided with a fully compliant VME64/VME64X interface (see § 1.1), whose main features are:

- EUROCARD 9U Format
- J1/P1 and J2/P2 with either 160 pins (5 rows) or 96 (3 rows) connectors
- A24, A32 and CR-CSR address modes
- D32, BLT/MBLT, 2eVME, 2eSST data modes
- MCST write capability
- CBLT data transfers
- RORA interrupter
- Configuration ROM


---

### 3.10.1. Addressing capabilities


#### 3.10.1.1. Base address

The module works in A24/A32 mode. The Base Address of the module can be fixed through four rotary switches (see § 2.6) and is written into a word of 24 or 32 bit. The Base Address can be selected in the range:

0x000000      ←→      0xFF0000      A24 mode

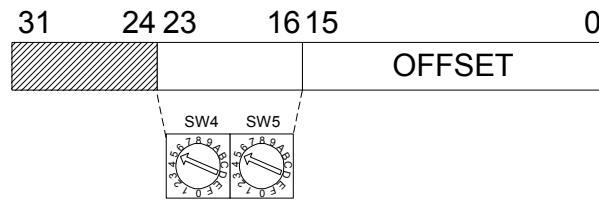

**Fig. 3.19: A24 addressing**

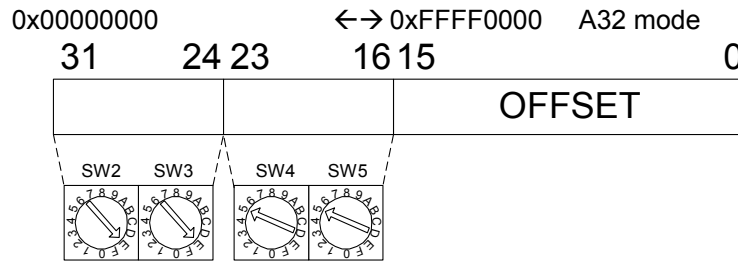


**Fig. 3.20: A32 addressing**

The Base Address of the module is selected through four rotary switches (see § 2.6), then it is validated only with either a Power ON cycle or a System Reset (see § 3.8).

**3.10.1.2. CR/CSR address**


GEO address is picked up from relevant backplane lines and written onto bit 23..19 of CR/CSR space, indicating the slot number in the crate; the recognised Address Modifier for this cycle is 2F. *This feature is implemented only on versions with 160pin connectors.*



**Fig. 3.21: CR/CSR addressing**

**3.10.1.3. Address relocation**

Relocation Address register (see § 4.39) allows to set via software the board Base Address (valid values ≠ 0). Such register allows to overwrite the rotary switches settings; its setting is enabled via VME Control Register (see § 4.30). The used addresses are:

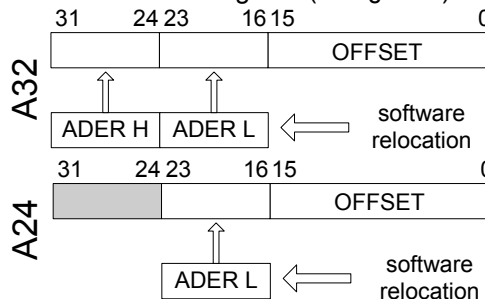

**Fig. 3.22: Software relocation of base address**

---

## 3.11. Data transfer capabilities

The board supports D32 single data readout, Block Transfer BLT32 and MBLT64, 2eVME and 2eSST cycles. Sustained readout rate is up to 60 MB/s with MBLT64, up to 100 MB/s with 2eVME and up to 160 MB/s with 2eSST.

---

## 3.12. Events readout

---

### 3.12.1. Sequential readout

The events, once written in the SRAMs (Memory Event Buffers), become available for readout via VME. During the memory readout, the board can continue to store more events (independently from the readout) on the free buffers. The acquisition process is therefore "deadtimeless", until the memory becomes full.

Although the memories are SRAMs, VMEBus does not handle directly the addresses, but takes them from a FIFO. Therefore, data are read from the memories sequentially, according to the selected Readout Logic, from a memory space mapped on 4Kbytes (0x0000÷0x0FFC).

The events are readout sequentially and completely, starting from the Header of the first available event, followed by the Trigger Time Tag, the Event Counter and all the samples of the channels (from 0 to 7). Once an event is completed, the relevant memory buffer becomes free and ready to be written again (old data are lost). After the last word in an event, the first word (Header) of the subsequent event is readout. It is not possible to readout an event partially (see also § 3.3.5).

#### 3.12.1.1. SINGLE D32

This mode allows to readout a word per time, from the header (actually 4 words) of the first available event, followed by all the words until the end of the event, then the second event is transferred. The exact sequence of the transferred words is shown in § 3.3.5.

We suggest, after the 1<sup>st</sup> word is transferred, to check the Event Size information and then do as many D32 cycles as necessary (actually Event Size -1) in order to read completely the event.

#### 3.12.1.2. BLOCK TRANSFER D32/D64, 2eVME

BLT32 allows, via a single channel access, to read N events in sequence, N is set via the BLT Event Number register (see § 4.42).


The event size depends on the Buffer Size Register setting (§ 4.15); namely:

$$[\text{Event Size}] = [8 * (\text{Block Size})] + [16 \text{ bytes}]$$

Smaller event size can be achieved via Custom Size setting (see § 3.3.4.1 and § 4.17).

Then it is necessary to perform as many cycles as required in order to readout the programmed number of events.

We suggest to enable BERR signal during BLT32 cycles, in order to end the cycle avoiding filler readout. The last BLT32 cycle will not be completed, it will be ended by BERR after the #N event in memory is transferred (see example in the figure below).

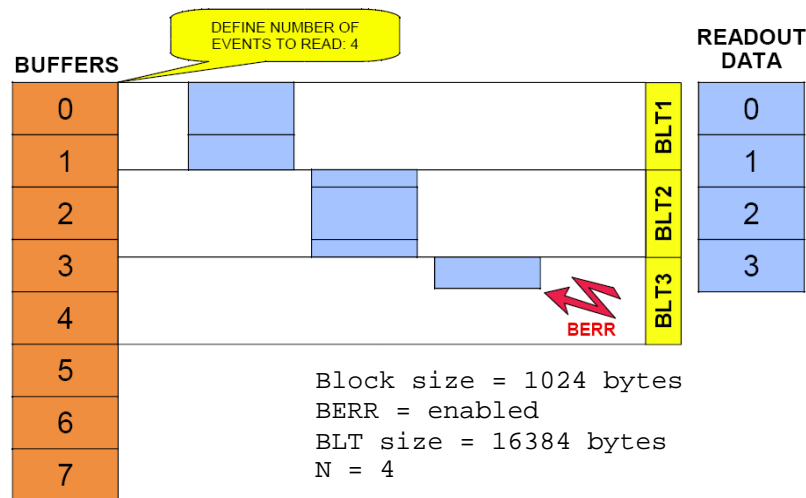

**Fig. 3.23: Example of BLT readout**

Since some 64 bit CPU's cut off the last 32 bit word of a transferred block, if the number of words composing such block is odd, it is necessary to add a dummy word (which has then to be removed via software) in order to avoid data loss. This can be achieved by setting the ALIGN64 bit in the VME Control register (see § 4.30).

MBLT64 cycle is similar to the BLT32 cycle, except that the address and data lines are multiplexed to form 64 bit address and data buses.

The 2eVME allows to achieve higher transfer rates thanks to the requirement of only two edges of the two control signals (DS and DTACK) to complete a data cycle.

### 3.12.1.3. CHAINED BLOCK TRANSFER D32/D64

The V1724 allows to readout events from more daisy chained boards (Chained Block Transfer mode).

The technique which handles the CBLT is based on the passing of a token between the boards; it is necessary to verify that the used VME crate supports such cycles.

Several contiguous boards, in order to be daisy chained, must be configured as "first", "intermediate" or "last" via MCST Base Address and Control Register (see § 4.38). A common Base Address is then defined via the same register; when a BLT cycle is executed at the address  $CBLT\_Base + 0x0000 \div 0x0FFC$ , the "first" board starts to transfer its data, driving DTACK properly; once the transfer is completed, the token is passed to the second board via the IACKIN-IACKOUT lines of the crate, and so on until the "last" board, which completes the data transfer and asserts BERR (which has to be enabled): the Master then ends the cycle and the slave boards are rearmed for a new acquisition.

If the size of the BLT cycle is smaller than the events size, the board which has the token waits for another BLT cycle to begin (from the point where the previous cycle has ended).


### 3.12.2. Random readout (to be implemented)

Events can be readout partially (not necessarily starting from the first available) and are not erased from the memories, unless a command is performed. In order to perform the random readout it is necessary to execute an **Event Block Request** via VME.

Indicating the event to be read (page number = 12 bit datum), the offset of the first word to be read inside the event (12 bit datum) and the number of words to be read (size = 10 bit datum). At this point the data space can be read, starting from the header (which

reports the required size, not the actual one, of the event), the Trigger Time Tag, the Event Counter and the part of the event required on the channel addressed in the Event Block Request.

After data readout, in order to perform a new random readout, it is necessary a new Event Block Request, otherwise Bus Error is signalled. In order to empty the buffers, it is necessary a write access to the Buffer Free register (see § 4.16): the datum written is the number of buffers in sequence to be emptied.

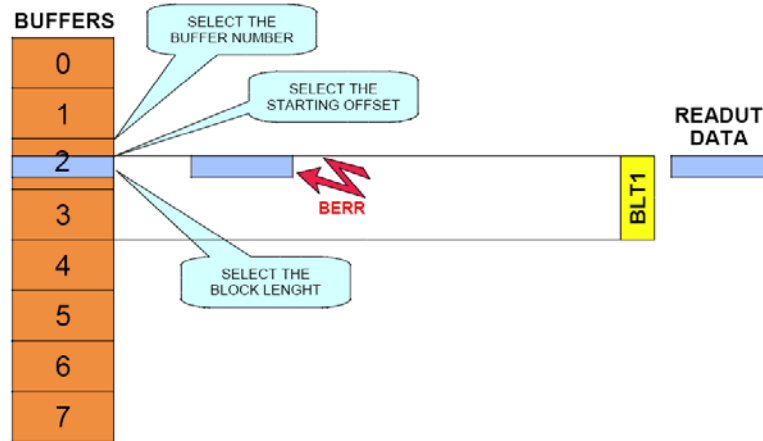

**Fig. 3.24: Example of random readout**

### 3.12.3. Event Polling

A read access to Event Size register (see § 4.33) allows “polling” the number of 32 bit words composing the next event to be read: this permits to perform a properly sized (according to the Event Size information) BLT readout from the Memory Event Buffer.

## 3.13. Optical Link

The board houses a daisy chainable Optical Link able to transfer data at 80 MB/s, therefore it is possible to connect up to eight V1724 (64 ADC channels) to a single Optical Link Controller: a standard PC equipped with the PCI card CAEN Mod. A2818. The A2818 is a 32-bit 33 MHz PCI card; the communication path uses optical fiber cables as physical transmission line (Mod. AY2705, AY2720, AI2705, AI2720). The Optical Link allows to perform VME read (Single data transfer and Block transfers) and write (Single data transfer) operations.

The parameters for read/write accesses via optical link are the same used by VME cycles (Address Modifier, Base Address, data Width, etc); wrong parameter settings cause Bus Error.


VME Control Register bit 3 (see § 4.34) allows to enable the module to broadcast an interrupt request on the Optical Link; an 8 bit mask (see § 3.13.12 and § 3.13.13) allows to enable the corresponding A2818's to propagate the interrupt on the PCI bus as a request from the Optical Link is sensed.

VME and Optical Link accesses take place on independent paths and are handled by board internal controller, with VME having higher priority; anyway it is better to avoid accessing the board via VME and Optical Link simultaneously.

### **N.B.: Optical Link is not available on the Mod. V1724LC**

The following diagram shows how to connect V1724 modules to the Optical Link:



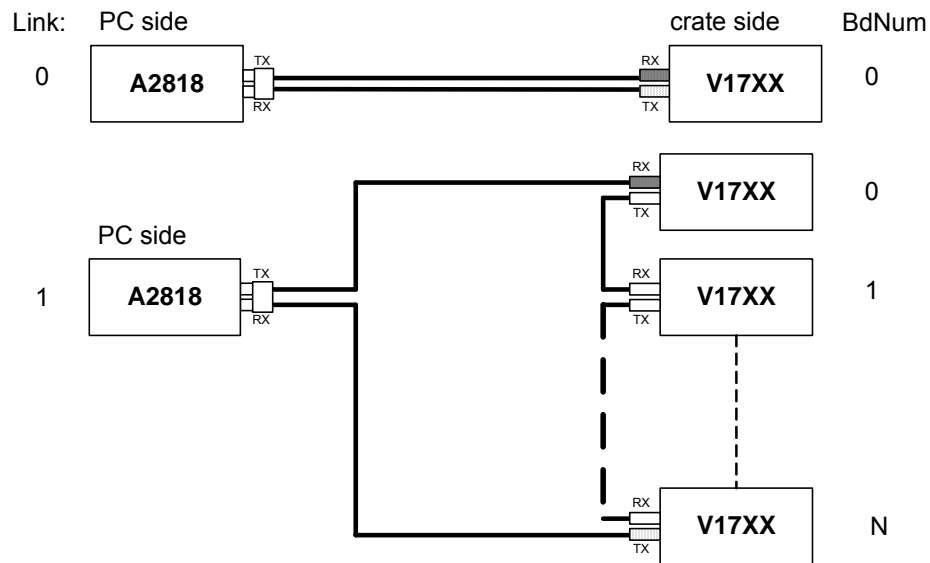

**Fig. 3.25: Optical Link daisy chain**

The Optical Link can be operated through the CAENVMELib library: a set of ANSI C functions which permits an user program the use and the configuration of the modules. The present description refers to CAENVMELib, available in the following formats:

- Win32 DLL (CAEN provides the CAENVMELib.lib stub for Microsoft Visual C++ 6.0)
- Linux dynamic library

CAENVMELib is logically located between an application like the samples provided and the device driver.

The following sections describe the CAENVMELib library and its implemented functions.

---

### **3.13.1. CAENVME\_Init**

Parameters:

- [in] BdType : The model of the board (V2718).
- [in] Link : The index of the A2818 (see figure above).
- [in] BdNum : The board number in the link (see figure above).
- [out] Handle : The handle that identifies the device.

Returns:

An error code about the execution of the function.

Description:

The function generates an opaque handle to identify the module attached to the PC. It must be specified only the module index (BdNum) because the link is PCI.

CAENVME\_API

CAENVME\_Init(CVBoardTypes BdType, short Link, short BdNum, long \*Handle);

---

### **3.13.2. CAENVME\_End**

Parameters:

- [in] Handle: The handle that identifies the module.

Returns:

An error code about the execution of the function.

Description:

Notifies the library about the end of work and free the allocated resources.

CAENVME\_API  
CAENVME\_End(long Handle);

---

### 3.13.3. CAENVME\_ReadCycle

Parameters:

[in] Handle : The handle that identifies the device.  
[in] Address : The VME bus address<sup>3</sup>.  
[out] Data : The data read from the VME bus.  
[in] AM : The address modifier .  
[in] DW : The data width.

Returns:

An error code about the execution of the function.

Description:

The function performs a single VME read cycle.

CAENVME\_API  
CAENVME\_ReadCycle(long Handle, unsigned long Address, void \*Data,  
CVAddressModifier AM, CVDataWidth DW);

---

### 3.13.4. CAENVME\_WriteCycle

Parameters:

[in] Handle : The handle that identifies the device.  
[in] Address : The VME bus address.  
[in] Data : The data written to the VME bus.  
[in] AM : The address modifier.  
[in] DW : The data width.

Returns:

An error code about the execution of the function.

Description:

The function performs a single VME write cycle.

CAENVME\_API  
CAENVME\_WriteCycle(long Handle, unsigned long Address, void \*Data,  
CVAddressModifier AM, CVDataWidth DW);

---

### 3.13.5. CAENVME\_MultiRead

Parameters:

[in] Handle : The handle that identifies the device.

---

<sup>3</sup> The Board base address set via rotary switches (see § 2.6)

[in] Address : An array of VME bus addresses.  
[out] Data : An array of data read from the VME bus.  
[in] AM : An array of address modifiers.  
[in] DW : An array of data widths.

Returns:

An array of error codes about the execution of the function.

Description:

The function performs a sequence of VME read cycles.

CAENVME\_API

CAENVME\_MultiRead(long Handle, unsigned long Address, void \*Data,  
CVAddressModifier AM, CVDataWidth DW);

---

### 3.13.6. CAENVME\_MultiWrite

Parameters:

[in] Handle : The handle that identifies the device.  
[in] Address : An array of VME bus addresses.  
[in] Data : An array of data written to the VME bus.  
[in] AM : An array of address modifiers.  
[in] DW : An array of data widths.

Returns:

An array of error codes about the execution of the function.

Description:

The function performs a sequence of VME write cycles.

CAENVME\_API

CAENVME\_ReadCycle(long Handle, unsigned long Address, void \*Data,  
CVAddressModifier AM, CVDataWidth DW);

---

### 3.13.7. CAENVME\_BLTReadCycle

Parameters:

[in] Handle : The handle that identifies the device.  
[in] Address : The VME bus address.  
[out] Buffer : The data read from the VME bus.  
[in] Size : The size of the transfer in bytes.  
[in] AM : The address modifier.  
[in] DW : The data width.  
[out] count : The number of bytes transferred.

Returns:

An error code about the execution of the function.

Description:

The function performs a VME block transfer read cycle. It can be used to perform MBLT transfers using 64 bit data width.

CAENVME\_API

CAENVME\_BLTReadCycle(long Handle, unsigned long Address, unsigned char \*Buffer,  
int Size, CVAddressModifier AM, CVDataWidth DW, int \*count);

---

### **3.13.8. CAENVME\_FIFOBLTReadCycle**

Parameters:

- [in] Handle : The handle that identifies the device.
- [in] Address : The VME bus address.
- [out] Buffer : The data read from the VME bus.
- [in] Size : The size of the transfer in bytes.
- [in] AM : The address modifier
- [in] DW : The data width.
- [out] count : The number of bytes transferred.

Returns:

An error code about the execution of the function.

Description:

The function performs a VME block transfer read cycle. It can be used to perform MBLT transfers using 64 bit data width. The Address is not incremented on the VMEBus during the cycle.

```
CAENVME_API  
CAENVME_FIFOBLTReadCycle(int32_t Handle, uint32_t Address, void *Buffer,  
int Size, CVAddressModifier AM, CVDataWidth DW, int *count);
```

---

### **3.13.9. CAENVME\_MBLTReadCycle**

Parameters:

- [in] Handle : The handle that identifies the device.
- [in] Address : The VME bus address.
- [out] Buffer : The data read from the VME bus.
- [in] Size : The size of the transfer in bytes.
- [in] AM : The address modifier.
- [out] count : The number of bytes transferred.

Returns:

An error code about the execution of the function.

Description:

The function performs a VME multiplexed block transfer read cycle.

```
CAENVME_API  
CAENVME_MBLTReadCycle(long Handle, unsigned long Address, unsigned char  
*Buffer, int Size, CVAddressModifier AM, int *count);
```

---

### **3.13.10. CAENVME\_FIFOMBLTReadCycle**

Parameters:

- [in] Handle : The handle that identifies the device.
- [in] Address : The VME bus address.
- [out] Buffer : The data read from the VME bus.
- [in] Size : The size of the transfer in bytes.
- [in] AM : The address modifier.
- [out] count : The number of bytes transferred.

Returns:

An error code about the execution of the function.

Description:

The function performs a VME multiplexed block transfer read cycle.  
The Address is not incremented on the VMEBus during the cycle.

```
CAENVME_API  
CAENVME_FIFOMBLTReadCycle(int32_t Handle, uint32_t Address, void *Buffer,  
int Size, CVAddressModifier AM, int *count);
```

---

### **3.13.11. CAENVME\_IRQCheck**

Parameters:

[in] Handle : The handle that identifies the device.  
[out] Mask : A bit-mask<sup>4</sup> indicating the active IRQ lines

Returns:

An error code about the execution of the function.

Description:

The function returns a bit mask indicating the active IRQ lines.

```
CAENVME_API  
CAENVME_IRQCheck(long Handle, byte *Mask);
```

---

### **3.13.12. CAENVME\_IRQEnable**

Parameters:

[in] Handle : The handle that identifies the device.  
[in] Mask : A bit-mask indicating the IRQ lines.

Returns:

An error code about the execution of the function.

Description:

The function enables the IRQ lines specified by Mask.

```
CAENVME_API  
CAENVME_IRQEnable(long dev, unsigned long Mask);
```

---

### **3.13.13. CAENVME\_IRQDisable**

Parameters:

[in] Handle : The handle that identifies the device.  
[in] Mask : A bit-mask indicating the IRQ lines.

Returns:

An error code about the execution of the function.

Description:

The function disables the IRQ lines specified by Mask.

---

<sup>4</sup>Actually only bit 0 in the mask is meaningful

CAENVME\_API  
CAENVME\_IRQDisable(long dev, unsigned long Mask);

---

### **3.13.14. CAENVME\_IRQWait**

Parameters:

[in] Handle : The handle that identifies the device.  
[in] Mask : A bit-mask indicating the IRQ lines.  
[in] Timeout : Timeout in milliseconds.

Returns:

An error code about the execution of the function.

Description:

The function waits the IRQ lines specified by Mask until one of them raise or timeout expires.

CAENVME\_API

CAENVME\_IRQWait(long dev, unsigned long Mask, unsigned long Timeout);

## 4. VME Interface

The following sections will describe in detail the board's VME-accessible registers content.

### 4.1. Registers address map

**Table 4.1: Address Map for the Model V1724**

REGISTER NAME	ADDRESS	ASIZE	DSIZE	MODE	H_RES	S_RES	CLR
EVENT READOUT BUFFER	0x0000-0x0FFC	A24/A32/A64	D32	R	X	X	X
Channel n ZS_THRES	0x1n24	A24/A32	D32	R/W	X	X	
Channel n ZS_NSAMP	0x1n28	A24/A32	D32	R/W	X	X	
Channel n THRESHOLD	0x1n80	A24/A32	D32	R/W	X	X	
Channel n TIME OVER/UNDER THRESHOLD	0x1n84	A24/A32	D32	R/W	X	X	
Channel n STATUS	0x1n88	A24/A32	D32	R	X	X	
Channel n AMC FPGA FIRMWARE REVISION	0x1n8C	A24/A32	D32	R			
Channel n BUFFER OCCUPANCY	0x1n94	A24/A32	D32	R	X	X	X
Channel n DAC	0x1n98	A24/A32	D32	R/W	X	X	
Channel n ADC CONFIGURATION	0x1n9C	A24/A32	D32	R/W	X	X	
CHANNEL CONFIGURATION	0x8000	A24/A32	D32	R/W	X	X	
CHANNEL CONFIGURATION BIT SET	0x8004	A24/A32	D32	W	X	X	
CHANNEL CONFIGURATION BIT CLEAR	0x8008	A24/A32	D32	W	X	X	
BUFFER ORGANIZATION	0x800C	A24/A32	D32	R/W	X	X	
BUFFER FREE	0x8010	A24/A32	D32	R/W	X	X	
CUSTOM SIZE	0x8020	A24/A32	D32	R/W	X	X	
ACQUISITION CONTROL	0x8100	A24/A32	D32	R/W	X	X	
ACQUISITION STATUS	0x8104	A24/A32	D32	R			
SW TRIGGER	0x8108	A24/A32	D32	W			
TRIGGER SOURCE ENABLE MASK	0x810C	A24/A32	D32	R/W	X	X	
FRONT PANEL TRIGGER OUT ENABLE MASK	0x8110	A24/A32	D32	R/W	X	X	
POST TRIGGER SETTING	0x8114	A24/A32	D32	R/W	X	X	
FRONT PANEL I/O DATA	0x8118	A24/A32	D32	R/W	X	X	
FRONT PANEL I/O CONTROL	0x811C	A24/A32	D32	R/W	X	X	
CHANNEL ENABLE MASK	0x8120	A24/A32	D32	R/W	X	X	

REGISTER NAME	ADDRESS	ASIZE	DSIZE	MODE	H_RES	S_RES	CLR
ROC FPGA FIRMWARE REVISION	0x8124	A24/A32	D32	R			
DOWNSAMPLE FACTOR	0x8128	A24/A32	D32	R/W	X	X	
EVENT STORED	0x812C	A24/A32	D32	R	X	X	X
SET MONITOR DAC	0x8138	A24/A32	D32	R/W	X	X	
BOARD INFO	0x8140	A24/A32	D32	R			
MONITOR MODE	0x8144	A24/A32	D32	R/W	X	X	
EVENT SIZE	0x814C	A24/A32	D32	R	X	X	X
ANALOG MONITOR	0x8150	A24/A32	D32	R/W	X	X	
VME CONTROL	0xEF00	A24/A32	D32	R/W	X		
VME STATUS	0xEF04	A24/A32	D32	R			
BOARD ID	0xEF08	A24/A32	D32	R/W	X	X	
MULTICAST BASE ADDRESS & CONTROL	0xEF0C	A24/A32	D32	R/W	X		
RELOCATION ADDRESS	0xEF10	A24/A32	D32	R/W	X		
INTERRUPT STATUS ID	0xEF14	A24/A32	D32	R/W	X		
INTERRUPT EVENT NUMBER	0xEF18	A24/A32	D32	R/W	X	X	
BLT EVENT NUMBER	0xEF1C	A24/A32	D32	R/W	X	X	
SCRATCH	0xEF20	A24/A32	D32	R/W	X	X	
SW RESET	0xEF24	A24/A32	D32	W			
SW CLEAR	0xEF28	A24/A32	D32	W			
FLASH ENABLE	0xEF2C	A24/A32	D32	R/W	X		
FLASH DATA	0xEF30	A24/A32	D32	R/W	X		
CONFIGURATION RELOAD	0xEF34	A24/A32	D32	W			
CONFIGURATION ROM	0xF000-0xF3FC	A24/A32	D32	R			

## 4.2. Configuration ROM (0xF000-0xF084; r)

The following registers contain some module's information, they are D32 accessible (read only):

- **OUI:** manufacturer identifier (IEEE OUI)
- **Version:** purchased version
- **Board ID:** Board identifier
- **Revision:** hardware revision identifier
- **Serial MSB:** serial number (MSB)
- **Serial LSB:** serial number (LSB)



**Table 4.2: ROM Address Map for the Model V1724**

Description	Address	Content
checksum	0xF000	0xA4
checksum_length2	0xF004	0x00
checksum_length1	0xF008	0x00
checksum_length0	0xF00C	0x20
constant2	0xF010	0x83
constant1	0xF014	0x84
constant0	0xF018	0x01
c_code	0xF01C	0x43
r_code	0xF020	0x52
oui2	0xF024	0x00
oui1	0xF028	0x40
oui0	0xF02C	0xE6
vers	0xF030	V1724LC : 0x10 V1724, VX1724: 0x11 V1724B, VX1724B: 0x40 V1724C, VX1724C: 0x12 V1724D, VX1724D: 0x41 V1724E, VX1724E: 0x42 V1724F, VX1724F: 0x43
board2	0xF034	V1724: 0x00 VX1724: 0x01
board1	0xF038	0x06
board0	0xF03C	0xBC
revis3	0xF040	0x00
revis2	0xF044	0x00
revis1	0xF048	0x00
revis0	0xF04C	0x01
sernum1	0xF080	0x00
sernum0	0xF084	0x16

These data are written into one Flash page; at Power ON the Flash content is loaded into the Configuration RAM, where it is available for readout.

### 4.3. Channel n ZS\_THRES (0x1n24; r/w)

Bit	Function
[31]	0 = Positive Logic 1 = Negative Logic
[30]	Threshold Weight (used in "Full Suppression based on the integral" only) 0 = Fine threshold step (Threshold = ZS_THRES[29:0]) 1 = Coarse threshold step (Threshold = ZS_THRES[29:0] * 64)
[29:0]	With "Full Suppression based on the integral", the 30 LSB value represents the value (depending on bit 30) to be compared with sum of the samples which compose the event, and see if it is over/under threshold (depending on the used logic). With "Full Suppression based on the amplitude", the 14 LSB represent the value to be compared with each sample of the event; and see if it is over/under threshold (depending on the used logic). With "Zero Length Encoding", the 14 LSB represent the value to be compared with each sample of the event, and see if it is "good" or "skip" type. (see § 3.4 and § 4.12)

#### 4.4. Channel n ZS\_NSAMP (0x1n28; r/w)

Bit	Function
[31:0]	With "Full Suppression based on the amplitude" (ZS AMP), bits [20:0] allow to set the number Ns of subsequent samples which must be found over/under threshold (depending on the used logic) necessary to validate the event; if this field is set to 0, it is considered "1". With "Zero length encoding" (ZLE) bit [15:0] allows to set/read N <sub>LBK</sub> : the number of data to be stored before the signal crosses the threshold. bit [31:16] allows to set/read N <sub>LFWD</sub> : the number of data to be stored after the signal crosses the threshold (see § 3.4 and § 4.12)

#### 4.5. Channel n Threshold (0x1n80; r/w)

Bit	Function
[13:0]	Threshold Value for Trigger Generation

Each channel can generate a local trigger as the digitised signal exceeds the V<sub>th</sub> threshold, and remains under or over threshold for N<sub>th</sub> couples of samples at least; local trigger is delayed of N<sub>th</sub> "quartets" of samples with respect to input signal. This register allows to set V<sub>th</sub> (LSB=input range/14bit); see also § 3.5.3.

#### 4.6. Channel n Over/Under Threshold (0x1n84; r/w)

Bit	Function
[11:0]	Number of Data under/over Threshold

Each channel can generate a local trigger as the digitised signal exceeds the V<sub>th</sub> threshold, and remains under or over threshold for N<sub>th</sub> "quartets" of samples at least; local trigger is delayed of N<sub>th</sub> "quartets" with respect to input signal. This register allows to set N<sub>th</sub>; see also § 3.5.3.

#### 4.7. Channel n Status (0x1n88; r)

Bit	Function
[5]	Buffer free error: 1 = trying to free a number of buffers too large
[4]	CH <sub>n+1</sub> enabled
[3]	CH <sub>n</sub> enabled
[2]	Channel n DAC (see § 4.10) Busy 1 = Busy 0 = DC offset updated
[1]	Memory empty
[0]	Memory full

#### 4.8. Channel n AMC FPGA Firmware (0x1n8C; r)

Bit	Function
[31:16]	Revision date in Y/M/DD format
[15:8]	Firmware Revision (X)
[7:0]	Firmware Revision (Y)

Bits [31:16] contain the Revision date in Y/M/DD format.

Bits [15:0] contain the firmware revision number coded on 16 bit (X.Y format).  
Example: revision 1.3 of 12<sup>th</sup> June 2007 is: 0x760C0103

#### 4.9. Channel n Buffer Occupancy (0x1n94; r)

Bit	Function
[10:0]	Occupied buffers (0..1024)

#### 4.10. Channel n DAC Register (0x1n98; r/w)

Bit	Function
[15:0]	DAC Data

Bits [15:0] allow to define a DC offset to be added the input signal in the  $-1.125V \div +1.125V$  range (low range) or in the  $-1V \div +8V$  range (high range), see also § 3.1.1. When Channel n Status bit 2 is set to 0, DC offset is updated (see § 4.7).

#### 4.11. Channel n ADC Configuration (0x1n9C; r/w)

Bit	Function
[31:0]	Reserved

#### 4.12. Channel Configuration (0x8000; r/w)

Bit	Function
[19-16]	Allows to select Zero Suppression algorithm: 0000 = no zero suppression (default); 0001 = full suppression based on the integral (ZS INT); 0010 = zero length encoding (ZLE); 0011 = full suppression based on the amplitude (ZS AMP)
[7]	0 = Analog monitor disabled 1 = Analog monitor disabled
[6]	0 = Trigger Output on Input Over Threshold 1 = Trigger Output on Input Under Threshold allows to generate local trigger either on channel over or under threshold (see § 4.3 and § 4.6)
[4]	0 = Memory Random Access 1 = Memory Sequential Access
[3]	0 = Test Pattern Generation Disabled 1 = Test Pattern Generation Enabled
[1]	0 = Trigger Overlapping Not Enabled 1 = Trigger Overlapping Enabled Allows to handle trigger overlap (see § 3.3.4)
[0]	0 = "Window" Gate 1 = "Single Shot" Gate Allows to handle samples validation (see § 3.3.1)

This register allows to perform settings which apply to all channels.  
It is possible to perform selective set/clear of the Channel Configuration register bits writing to 1 the corresponding set and clear bit at address 0x8004 (set) or 0x8008 (clear) see the following § 4.13 and § 4.14. Default value is 0x10.

#### 4.13. Channel Configuration Bit Set (0x8004; w)

Bit	Function
[7..0]	Bits set to 1 means that the corresponding bits in the Channel Configuration register are set to 1.

#### 4.14. Channel Configuration Bit Clear (0x8008; w)

Bit	Function
[7..0]	Bits set to 1 means that the corresponding bits in the Channel Configuration register are set to 0.

#### 4.15. Buffer Organization (0x800C; r/w)

Bit	Function
[3:0]	BUFFER CODE

The BUFFER CODE allows to divide the available Output Buffer Memory into a certain number of blocks, according to the following table:

**Table 4.3: Output Buffer Memory block division**

CODE	Nr. of blocks	Mem. Locations (max)	Block size	Samples/block (max)
0000	1	262144	1024K	512K
0001	2	131072	512K	256K
0010	4	65536	256K	128K
0011	8	32768	128K	64K
0100	16	16384	64K	32K
0101	32	8192	32K	16K
0110	64	4096	16K	8K
0111	128	2048	8K	4K
1000	256	1024	4K	2K
1001	512	512	2K	1K
1010	1024	256	1K	512

A write access to this register causes a Software Clear, see § 3.9. This register must not be written while acquisition is running. The number of Memory Locations depends on Custom size register setting (see § 4.17)

#### 4.16. Buffer Free (0x8010; r/w)

Bit	Function
[11:0]	N = Frees the first N Output Buffer Memory Blocks, see § 4.15

#### 4.17. Custom Size (0x8020; r/w)

Bit	Function
[31:0]	0= Custom Size disabled N <sub>Loc</sub> (≠0) = Number of memory locations per event (1 location = 2 samples)

This register must not be written while acquisition is running.

## 4.18. Acquisition Control (0x8100; r/w)

Bit	Function
[5]	0 = Normal Mode (default): board becomes full, whenever all buffers are full (see § 4.15) 1 = Always keep one buffer free: board becomes full, whenever N-1 buffers are full; N = nr. of blocks (see § 4.15)
[4]	0 = DOWNSAMPLE DISABLED 1 = DOWNSAMPLE ENABLED allows to enable/disable downsampling, whose factor is set via Downsample Factor register (see § 4.28)
[3]	0 = COUNT ACCEPTED TRIGGERS 1 = COUNT ALL TRIGGERS allows to reject overlapping triggers (see § 3.3.4)
[2]	0 = Acquisition STOP 1 = Acquisition RUN allows to RUN/STOP Acquisition
[1:0]	00 = REGISTER-CONTROLLED RUN MODE 01 = S-IN CONTROLLED RUN MODE 10 = S-IN GATE MODE 11 = MULTI-BOARD SYNC MODE

Bits [1:0] description:

00 = REGISTER-CONTROLLED RUN MODE: multiboard synchronisation via S\_IN front panel signal

- RUN control: start/stop via set/clear of bit[2]
- GATE always active (Continuous Gate Mode) or Downsample Mode
- Continuous Gate Mode can be used only if Channel gate mode (see § 4.12) is set in Window Mode
- Downsample Mode can be used prior DOWNSAMPLE FACTOR register (see § 4.28) valid setting (≠0)

01 = S-IN CONTROLLED RUN MODE: Multiboard synchronisation via S-IN front panel signal

- S-IN works both as SYNC and RUN\_START command
- GATE always active (Continuous Gate Mode) or Downsample mode:
  - Continuous Gate Mode: Gate always active; to be used only if Channel Gate Mode (CHANNEL Configuration Register) is set to Window Mode
  - Downsample Mode: it is set via DOWNSAMPLE ENABLE and a value ≠0 at DOWNSAMPLE FACTOR register

10 = S-IN GATE MODE

- Multiboard synchronisation is disabled
- S-IN works as Gate signal set/clear of RUN/STOP bit

11 = MULTI-BOARD SYNC MODE

- Used only for Multiboard synchronisation

## 4.19. Acquisition Status (0x8104; r)

Bit	Function
[7]	PLL Status Flag (see § 2.5.1): 0 = PLL loss of lock 1 = no PLL loss of lock NOTE: flag can be restored to 1 via read access to Status Register (see § 4.36)
[6]	PLL Bypass mode (see § 2.5.1): 0 = No bypass mode 1 = Bypass mode

[5]	Clock source (see § 2.6): 0 = Internal 1 = External
[4]	EVENT FULL: it is set to 1 as the maximum nr. of events to be read is reached
[3]	EVENT READY: it is set to 1 as at least one event is available to readout
[2]	0 = RUN off 1 = RUN on
[1]	reserved
[0]	reserved

---

#### 4.20. Software Trigger (0x8108; w)

Bit	Function
[31:0]	A write access to this location generates a trigger via software

---

#### 4.21. Trigger Source Enable Mask (0x810C; r/w)

Bit	Function
[31]	0 = Software Trigger Disabled 1 = Software Trigger Enabled
[30]	0 = External Trigger Disabled 1 = External Trigger Enabled
[7]	0 = Channel 7 trigger disabled 1 = Channel 7 trigger enabled
[6]	0 = Channel 6 trigger disabled 1 = Channel 6 trigger enabled
[5]	0 = Channel 5 trigger disabled 1 = Channel 5 trigger enabled
[4]	0 = Channel 4 trigger disabled 1 = Channel 4 trigger enabled
[3]	0 = Channel 3 trigger disabled 1 = Channel 3 trigger enabled
[2]	0 = Channel 2 trigger disabled 1 = Channel 2 trigger enabled
[1]	0 = Channel 1 trigger disabled 1 = Channel 1 trigger enabled
[0]	0 = Channel 0 trigger disabled 1 = Channel 0 trigger enabled

This register bits[0,7] enable the channels to generate a local trigger as the digitised signal exceeds the Vth threshold (see § 3.5.3). Bit0 enables Ch0 to generate the trigger, bit1 enables Ch1 to generate the trigger and so on.

EXTERNAL TRIGGER ENABLE (bit30) enables the board to sense TRG-IN signals  
SW TRIGGER ENABLE (bit 31) enables the board to sense software trigger (see § 4.20).

---

#### 4.22. Front Panel Trigger Out Enable Mask (0x8110; r/w)

Bit	Function
[31]	0 = Software Trigger Disabled 1 = Software Trigger Enabled
[30]	0 = External Trigger Disabled 1 = External Trigger Enabled
[7]	0 = Channel 7 trigger disabled 1 = Channel 7 trigger enabled
[6]	0 = Channel 6 trigger disabled

Bit	Function
	1 = Channel 6 trigger enabled
[5]	0 = Channel 5 trigger disabled 1 = Channel 5 trigger enabled
[4]	0 = Channel 4 trigger disabled 1 = Channel 4 trigger enabled
[3]	0 = Channel 3 trigger disabled 1 = Channel 3 trigger enabled
[2]	0 = Channel 2 trigger disabled 1 = Channel 2 trigger enabled
[1]	0 = Channel 1 trigger disabled 1 = Channel 1 trigger enabled
[0]	0 = Channel 0 trigger disabled 1 = Channel 0 trigger enabled

This register bits[0,7] enable the channels to generate a TRG\_OUT front panel signal as the digitised signal exceeds the Vth threshold (see § 3.5.3).

Bit0 enables Ch0 to generate the TRG\_OUT, bit1 enables Ch1 to generate the TRG\_OUT and so on.

EXTERNAL TRIGGER ENABLE (bit30) enables the board to generate the TRG\_OUT  
SW TRIGGER ENABLE (bit 31) enables the board to generate TRG\_OUT (see § 4.20).

#### 4.23. Post Trigger Setting (0x8114; r/w)

Bit	Function
[31:0]	Post trigger value

The number written in this register corresponds to  $N_{samples} * 2 + Offset$  (t.b.d.), with  $N_{samples}$  = number of post-trigger samples.

#### 4.24. Front Panel I/O Data (0x8118; r/w)

Bit	Function
[15:0]	Front Panel I/O Data

Allows to Readout the logic level of LVDS I/Os and set the logic level of LVDS Outputs.

#### 4.25. Front Panel I/O Control (0x811C; r/w)

Bit	Function
[15]	0 = I/O Normal operations 1 = I/O Test Mode
[14]	1 = TRIGGER OUT Value set to test mode
[7:6]	00 = General Purpose I/O 01 = Programmed I/O 10 = Pattern mode: LVDS signals are input and their value is written into header TTT field (see § 3.3.5)
[5]	0 = LVDS I/O 15..12 are inputs 1 = LVDS I/O 15..12 are outputs
[4]	0 = LVDS I/O 11..8 are inputs 1 = LVDS I/O 11..8 are outputs
[3]	0 = LVDS I/O 7..4 are inputs 1 = LVDS I/O 7..4 are outputs
[2]	0 = LVDS I/O 3..0 are inputs 1 = LVDS I/O 3..0 are outputs
[1]	0 = panel output signals (TRG-OUT/CLKOUT) enabled 1 = panel output signals (TRG-OUT/CLKOUT) enabled in high impedance

Bit	Function
[0]	0 = TRG/CLK are NIM I/O Levels 1 = TRG/CLK are TTL I/O Levels

---

#### 4.26. Channel Enable Mask (0x8120; r/w)

Bit	Function
[7]	0 = Channel 7 disabled 1 = Channel 7 enabled
[6]	0 = Channel 6 disabled 1 = Channel 6 enabled
[5]	0 = Channel 5 disabled 1 = Channel 5 enabled
[4]	0 = Channel 4 disabled 1 = Channel 4 enabled
[3]	0 = Channel 3 disabled 1 = Channel 3 enabled
[2]	0 = Channel 2 disabled 1 = Channel 2 enabled
[1]	0 = Channel 1 disabled 1 = Channel 1 enabled
[0]	0 = Channel 0 disabled 1 = Channel 0 enabled

Enabled channels provide the samples which are stored into the events (and not erased). The mask cannot be changed while acquisition is running.

---

#### 4.27. ROC FPGA Firmware Revision (0x8124; r)

Bit	Function
[31:16]	Revision date in Y/M/DD format
[15:8]	Firmware Revision (X)
[7:0]	Firmware Revision (Y)

Bits [31:16] contain the Revision date in Y/M/DD format.

Bits [15:0] contain the firmware revision number coded on 16 bit (X.Y format).

---

#### 4.28. Downsample Factor (0x8128; r/w)

Bit	Function
[31:0]	This register allows to set $N$ : sampling frequency will be divided by $N+1$ . Downsampling is enabled via Acquisition Control register; see § 4.17

---

#### 4.29. Event Stored (0x812C; r)

Bit	Function
[31:0]	This register contains the number of events currently stored in the Output Buffer

This register value cannot exceed the maximum number of available buffers according to setting of buffer size register.



### 4.30. Set Monitor DAC (0x8138; r/w)

Bit	Function
[11:0]	This register allows to set the DAC value (12bit)

This register allows to set the DAC value in Voltage level mode (see § 2.7).  
LSB = 0.244 mV, terminated on 50 Ohm.

### 4.31. Board Info (0x8140; r)

Bit	Function
[15:8]	Memory size (Mbyte/channel)
[7:0]	Board Type: 0 = V1724

### 4.32. Monitor Mode (0x8144; r/w)

Bit	Function
[2:0]	This register allows to encode the Analog Monitor (see § 3.7) operation: 000 = Trigger Majority Mode 001 = Test Mode 010 = Analog Monitor/Inspection Mode 011 = Buffer Occupancy Mode 100 = Voltage Level Mode

### 4.33. Event Size (0x814C; r)

Bit	Function
[31:0]	Nr. of 32 bit words in the next event

### 4.34. Analog Monitor (0x8150; r/w)

Bit	Function
[21,20]	Magnify factor: 00 = 1x 01 = 2x 10 = 4x 11 = 8x
[19]	Offset sign (0=positive; 1=negative)
[18:8]	Offset Value
[7]	0 = Channel 7 disabled 1 = Channel 7 enabled
[6]	0 = Channel 6 disabled 1 = Channel 6 enabled
[5]	0 = Channel 5 disabled 1 = Channel 5 enabled
[4]	0 = Channel 4 disabled 1 = Channel 4 enabled
[3]	0 = Channel 3 disabled 1 = Channel 3 enabled
[2]	0 = Channel 2 disabled 1 = Channel 2 enabled
[1]	0 = Channel 1 disabled 1 = Channel 1 enabled
[0]	0 = Channel 0 disabled

	1 = Channel 0 enabled
--	-----------------------

#### 4.35. VME Control (0xEF00; r/w)

Bit	Function
[6]	0 = RELOC Disabled (BA is selected via Rotary Switch; see § 2.6) 1 = RELOC Enabled (BA is selected via RELOC register; see § 4.39)
[5]	0 = ALIGN64 Disabled 1 = ALIGN64 Enabled (see § 3.12.1.2)
[4]	0 = BERR Not Enabled; the module does not send a Bus Error as the last datum is readout, when aligned data readout is enabled, see §3.12.1 1 = BERR Enabled; the module is enabled either to generate a Bus error to finish a block transfer or during the empty buffer read out in D32
[3]	0 = Optical Link interrupt disabled 1 = Optical Link interrupt enabled
[2 :0]	Interrupt level (0= interrupt disabled)

#### 4.36. VME Status (0xEF04; r)

Bit	Function
[2]	0 = BERR FLAG: no Bus Error has occurred 1 = BERR FLAG: a Bus Error has occurred (this bit is re-set after a status register read out)
[1]	Reserved
[0]	0 = No Data Ready; 1 = Event Ready

#### 4.37. Board ID (0xEF08; r/w)

Bit	Function
[4 :0]	GEO

- VME64X versions: this register can be accessed in read mode only and contains the GEO address of the module picked from the backplane connectors; when CBLT is performed, the GEO address will be contained in the EVENT HEADER Board ID field (see § 3.3.5).
- Other versions: this register can be accessed both in read and write mode; it allows to write the correct GEO address (default setting = 0) of the module before CBLT operation. GEO address will be contained in the EVENT HEADER Board ID field (see § 3.3.5)

#### 4.38. MCST Base Address and Control (0xEF0C; r/w)

Bit	Function
[7:0]	These bits contain the most significant bits of the MCST/CBLT address of the module set via VME, i.e. the address used in MCST/CBLT operations.
[9:8]	Allows to set up the board for daisy chaining: 00 = disabled board 01 = last board 10 = first board

	11 = intermediate
--	-------------------

#### 4.39. Relocation Address (0xEF10; r/w)

Bit	Function
[15..0]	These bits contains the A31...A16 bits of the address of the module: it can be set via VME for a relocation of the Base Address of the module.

#### 4.40. Interrupt Status ID (0xEF14; r/w)

Bit	Function
[31..0]	This register contains the STATUS/ID that the module places on the VME data bus during the Interrupt Acknowledge cycle

#### 4.41. Interrupt Event Number (0xEF18; r/w)

Bit	Function
[9..0]	INTERRUPT EVENT NUMBER

If interrupts are enabled, the module generates a request whenever it has stored in memory a Number of events > INTERRUPT EVENT NUMBER

#### 4.42. BLT Event Number (0xEF1C; r/w)

Bit	Function
[7:0]	This register contains the number of complete events which has to be transferred via BLT/CBLT (see § 3.12.1.2).

#### 4.43. Scratch (0xEF20; r/w)

Bit	Function
[31:0]	Scratch ( <i>to be used to write/read words for VME test purposes</i> )

#### 4.44. Software Reset (0xEF24; w)

Bit	Function
[31:0]	A write access to this location allows to perform a software reset

#### 4.45. Software Clear (0xEF28; w)

Bit	Function
[31:0]	A write access to this location clears all the memories

#### 4.46. Flash Enable (0xEF2C; r/w)

Bit	Function
0	0 = Flash write ENABLED

| 1 = Flash write DISABLED  
This register is handled by the Firmware upgrade tool.

---

#### 4.47. Flash Data (0xEF30; r/w)

Bit	Function
[7:0]	Data to be serialized towards the SPI On board Flash

This register is handled by the Firmware upgrade tool.

---

## 5. Installation

- The Mod. V1724 fits into all 6U VME crates.
- VX1724 versions require VME64X compliant crates
- Turn the crate OFF before board insertion/removal
- Remove all cables connected to the front panel before board insertion/removal



### CAUTION

**ALL CABLES MUST BE REMOVED FROM THE FRONT PANEL  
BEFORE EXTRACTING THE BOARD FROM THE CRATE!**

---

### 5.1. Power ON sequence

To power ON the board follow this procedure:

1. insert the V1724 board into the crate
2. power up the crate

---

### 5.2. Power ON status

At power ON the module is in the following status:

- the Output Buffer is cleared;
- registers are set to their default configuration (see § 4)

---

### 5.3. Firmware upgrade

The board can store two firmware versions, called STD and BKP respectively; at Power On, a microcontroller reads the Flash Memory and programs the module with the firmware version selected via the JP2 jumper (see § 2.6), which can be placed either on the STD position (left), or in the BKP position (right). It is possible to upgrade the board firmware via VME, by writing the Flash; for this purpose, download the software package available at:

<http://www.caen.it/nuclear/product.php?mod=V1724>

The package includes the new firmware release file:

- v1724\_rN\_revX.Y\_W.Z..rbf

and the V1724 firmware upgrade tool:

- CAENDigitizerUpgrade.exe (windows executable)
- CAENDigitizerUpgrade tool (source code and VC++ project)

For upgrading the firmware, utilizing CAENDigitizerUpgrade.exe, open a DOS shell, then launch

```
CAENDigitizerUpgrade FileName BaseAdd [image] [/fast] [/nover]
```

where:

- **FileName** is the RBF file
- **BaseAdd** is the Base Address (Hex 32 bit) of the V1724
- **image** is '/standard' (default) or '/backup'
- **'fast'** enables fast programming (MultiRead/Write with CAEN Bridge)
- **'nover'** disables programming check

**N.B.:** it is strongly suggested to upgrade **ONLY** one of the stored firmware revisions (generally the STD one): if both revision are simultaneously updated, and a failure occurs, it will not be possible to upload the firmware via VME again!

**IMPORTANT NOTE:** all modules featuring PCB Rev.0 do not support firmware release v1724\_rN\_revX1.2\_0.4.rbf and later. PCB revision (Revision Field) can be read at Configuration ROM (see § 4.2). Contact [support.nuclear@caen.it](mailto:support.nuclear@caen.it) in order to upgrade firmware of modules featuring PCB Rev.0.

---

### 5.3.1. V1724 Upgrade files description

The board hosts one FPGA on the mainboard and one FPGA for each of the eight channels. The channel FPGAs firmware is identical. A unique file is provided that will updated all the FPGA at the same time.

#### **ROC FPGA MAINBOARD FPGA (Readout Controller + VME interface)**

There is one FPGA Altera Cyclone EP1C20.

#### **AMC FPGA CHANNEL FPGA (ADC readout/Memory Controller):**

There is one FPGA Altera Cyclone EP1C4  
(EP1C20 in V1724E/VX1724E/V1724F/VX1724F version).

All FPGAs can be upgraded via VMEBUS;

CAENDigitizerUpgrade utility program must be used for this purpose.

The programming file has the extension RBF and its name follows this general scheme:

```
v1724_rN_revX.Y_W.Z.RBF
```

where:

- N is the mainboard board PCB revision number. This information can be read:
  - from the Configuration ROM (see User's Manual)
  - from the silkscreen on the mainboard bottom side (BVV17240512AA Rev. 0 is an example of PCB revision number 0)
- X.Y is the major/minor revision number of the mainboard FPGA
- W.Z is the major/minor revision number of the channel FPGA

**WARNING:** you can restore the previous FW revision in case there is a failure when you run the upgrading program. There is a jumper on the mainboard that allows to select the "backup" copy of the firmware. You must upgrade all the FPGAs and keep the revisions

aligned; it is not guaranteed that the latest revision of one FPGA is compatible with an older revision.

**Upgrade examples:**

1) Upgrade to Rev 1.0(main FPGA)/Rev 0.2 (channel FPGA) of the standard page of the V1724:

```
CAENDigitizerUpgrade v1724_r1_rev1.0_0.2.rbf 32100000 /standard
```

2) Upgrade to Rev 1.0(main FPGA)/Rev 0.2 (channel FPGA) of the backup page of the V1724:

```
CAENDigitizerUpgrade v1724_r1_rev1.0_0.2.rbf 32100000 /backup
```

3) Upgrade to Rev 1.0(main FPGA)/Rev 1.1 (channel FPGA) of the standard page of the V1724:

```
CAENDigitizerUpgrade v1724_r1_rev1.0_1.1.rbf 32100000 /standard
```